



Pawnee-Buckner Subbasin

2009 Field Analysis Summary

April 28, 2010

Basin Management Team

Division of Water Resources
Kansas Department of Agriculture
109 SW Ninth Street, Second Floor
Topeka, Kansas 66612-1283
785-296-6087

Table of Contents

I. Introduction3
II. Precipitation5
III. Surface Water.....6
IV. Groundwater10
V. Water Use.....24
VI. Conclusions.....26
VII. Appendix27

Figures

Figure 1: Pawnee-Buckner Subbasin 3
Figure 2: Pawnee-Buckner Hydrologic Subunits 4
Figure 3: Average precipitation for the Pawnee-Buckner Subbasin 1939-2008 5
Figure 4: Monthly average precipitation for 2009 6
Figure 5: Pawnee-Buckner Subbasin USGS Streamflow Gages 7
Figure 6: Average Annual Streamflow at USGS Gages 1925-2008..... 8
Figure 7: Daily Streamflow for 2009..... 9
Figure 8: DWR Monitoring Wells 11
Figure 9: Monitoring well levels in Buckner 1 12
Figure 10: Monitoring well levels in Buckner 2 13
Figure 11: Monitoring well levels Pawnee 1 14
Figure 12: Monitoring well levels Pawnee 2 15
Figure 13: Monitoring well levels Pawnee 3 16
Figure 14: Monitoring well levels Pawnee 4 17
Figure 15: Monitoring well levels Pawnee 5 18
Figure 16: Monitoring well levels Pawnee 6 19
Figure 17: Monitoring well levels Sawlog..... 20
Figure 18: Monitoring well levels Ogallala 21
Figure 19: Monitoring well levels outside defined subunits..... 22
Figure 20: Monitoring well level outside defined subunits - Dakota Well..... 23
Figure 21: Pawnee-Buckner Subbasin Points of Diversion 24
Figure 22: Ground and surface water use by year 1988-2008 25
Figure 23: Annual Precipitation and Irrigation (inches per acre) 1988-2008 25
Figure 24: May-October Precipitation and Irrigation (inches per acre) 1988-2008 26

Table

Table 1: Water Rights in the Pawnee-Buckner Subbasin 24

The Ogallala aquifer is present in the western portion of the subbasin. The Ogallala recharges and releases more slowly than the alluvial aquifer. A portion of the Ogallala aquifer known as “the Ogallala subunit” is located in south central Hodgeman County between Buckner and Sawlog Creeks. The Ogallala subunit is one of the few significant areas of the Ogallala aquifer not located within a GMD.

In order to address the supply and use of water resources in the subbasin, a working group was formed in 1994. A committee of local stakeholders submitted recommendations for long-term management strategies for the alluvial valley to the chief engineer in February 2000. The committee recommendations included dividing the subbasin into ten hydrologic subunits to address water level declines during drought conditions. The management program required amending the current [Pawnee Valley IGUCA](#) order to implement the strategies recommended to the chief engineer. Figure 2 illustrates the ten hydrologic subunits proposed by the Basin Management Team (BMT).

These management strategies and a report by BMT on proposed subunits are available on the Kansas Department of Agriculture, Division of Water Resources (KDA-DWR) website at <http://www.ksda.gov/subbasin/>.

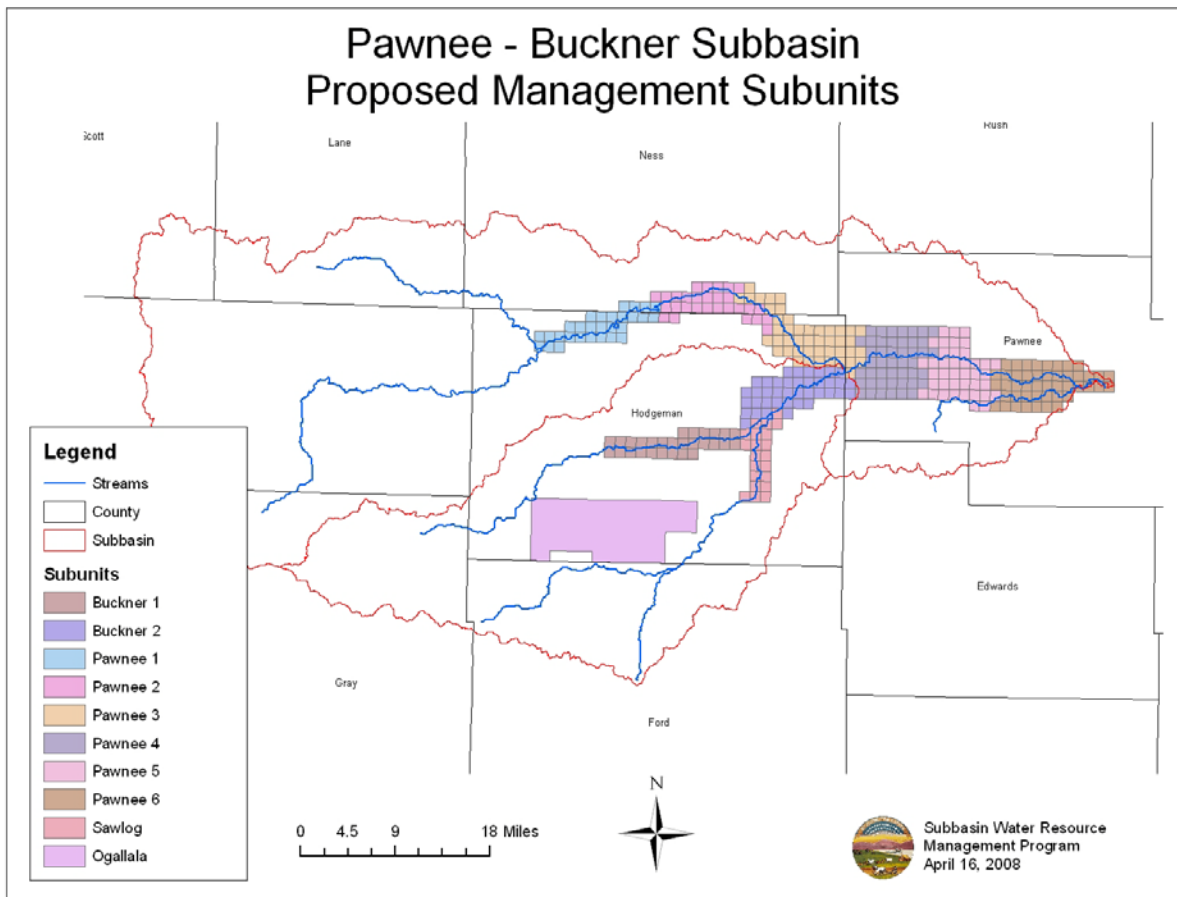


Figure 2: Pawnee-Buckner Hydrologic Subunits

II. Precipitation

Precipitation in the Pawnee-Buckner subbasin historically averages 22.7 inches per year based on five precipitation stations (historically there were three different stations at Jetmore). The graph in Figure 3 is based on averaged data from the National Climatic Data Center (NCDC) stations located in Jetmore (3 stations) in Hodgeman County and Larned and Burdett in Pawnee County. There have been several years with low precipitation but not in the consecutive years that characterized the drought of the 1950s. The highest annual precipitation occurred in 1993 with over 35 inches. The 1990s had several years of above average precipitation. Annual precipitation data for these NCDC stations is currently available through 2008. After dry years, 2002 and 2003, the subbasin has had above average precipitation in the period 2004-2007. In 2008, the precipitation was close to the historical annual average for the subbasin.

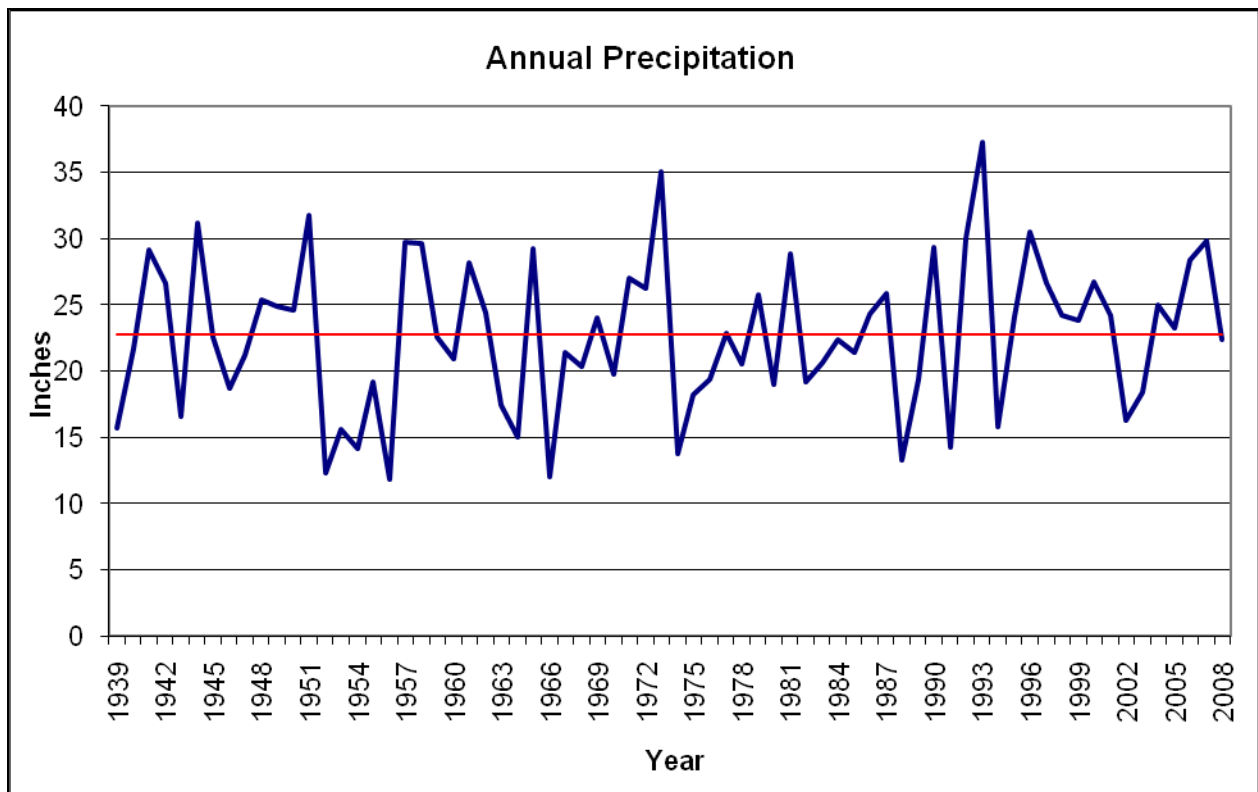


Figure 3: Average precipitation for the Pawnee-Buckner Subbasin 1939-2008

Figure 4 shows the 2009 monthly precipitation. This chart averages three stations, Jetmore, Burdett and Larned (December records were not available at the time of writing). June had highest precipitation with 5.7 inches while January had the least with less than a tenth of an inch. Excluding December, the 2009 annual average precipitation was 26.5 inches. This is higher than the historical annual average of 22.7 inches.

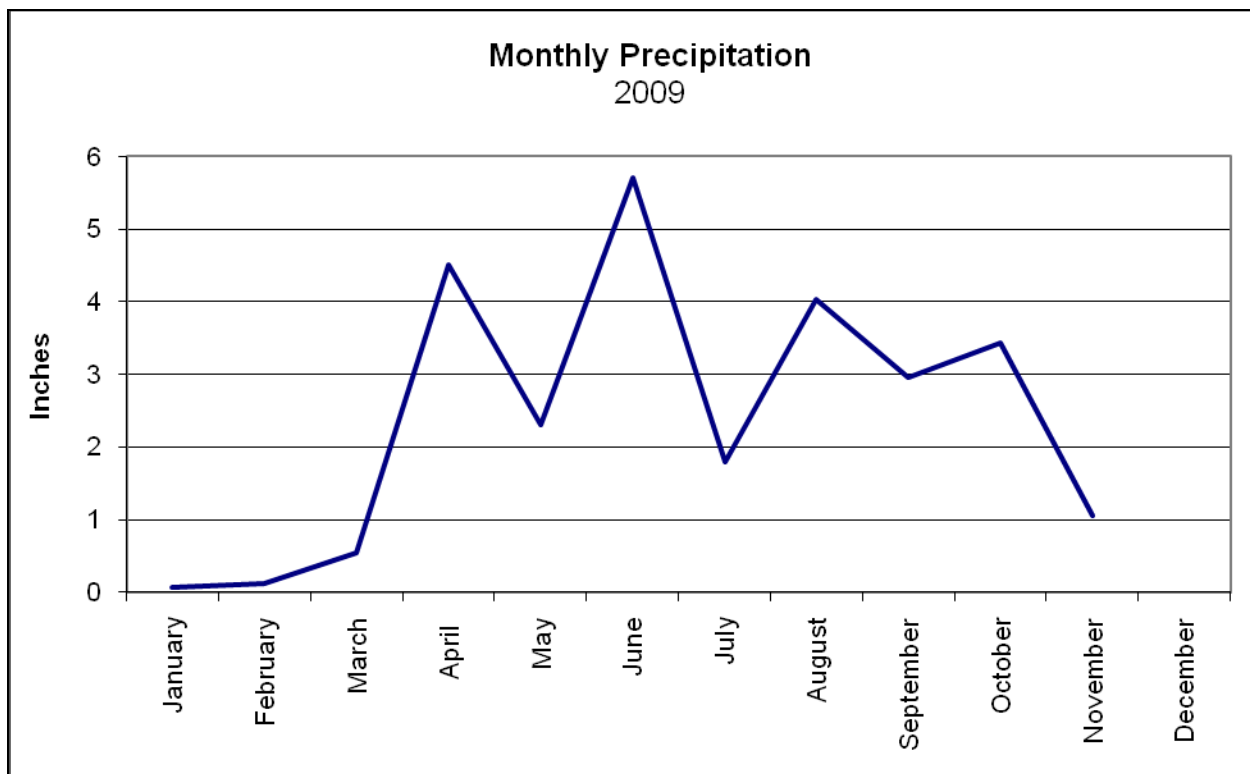


Figure 4: Monthly average precipitation for 2009

III. Surface Water

The three major stream systems in the subbasin are the Pawnee River, Buckner Creek and Sawlog Creek. The Pawnee River flows from west to east through Finney, Hodgeman, Ness and Pawnee counties and continues until it reaches its confluence with the Arkansas River near Larned, Kansas. Buckner and Sawlog Creeks originate in the southwestern portion of the subbasin in Hodgeman County. Sawlog Creek joins Buckner Creek in the eastern part of Hodgeman County. Buckner Creek then flows northeast until it reaches its confluence with the Pawnee River near the Pawnee-Hodgeman County line.

There are three USGS stream gaging stations in the subbasin: the Rozel gage on the Pawnee River, the Buckner Creek gage at Burdett and the Pawnee River gage at Burdett (Figure 5). Figure 6 charts the average annual streamflow for each gage and Figure 7 charts the daily streamflow for all three gages in 2009. The Burdett gage on Buckner Creek has a record that extends from 1996 to 2008. The average recorded streamflow was 16.48 cfs. The Rozel gage is missing one year of record in 1927, but otherwise has the longest record in the subbasin (1925-2008). The average recorded streamflow for Rozel was 58.34 cfs. The Burdett gage on the Pawnee River has a record that extends from 1982 to 2008. The average recorded streamflow for the Burdett gage is 10.01 cfs.

Both streamflow gages at Burdett maintained higher flows during the 1990s with Buckner Creek at 17.80 cfs and Pawnee River at 17.84 cfs. The Rozel gage averaged 44.55 cfs. Streamflows were lower from the period 2000-2007 averaging 16.55 cfs at Rozel, 7.04 cfs at Burdett on the Pawnee River and 6.03 cfs at Burdett on Buckner Creek (Figure 6).

The average streamflow for all three gages was lower in 2008 than in 2007. In 2009, the subbasin had a few high flow events. The largest event was in late June to early July. The Rozel gage on Pawnee River reached 811 cfs. The month of June had the most precipitation. This coincides with the large streamflow event (Figure 7).

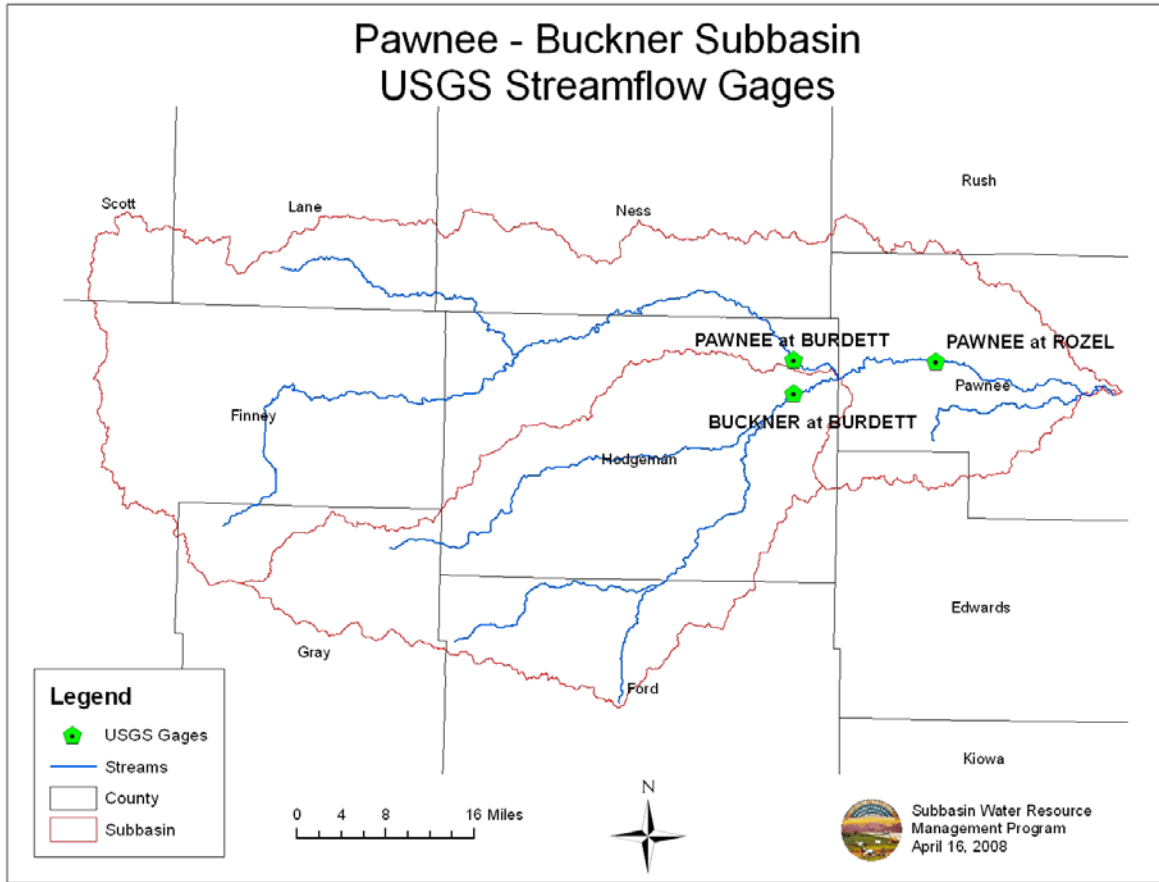


Figure 5: Pawnee-Buckner Subbasin USGS Streamflow Gages

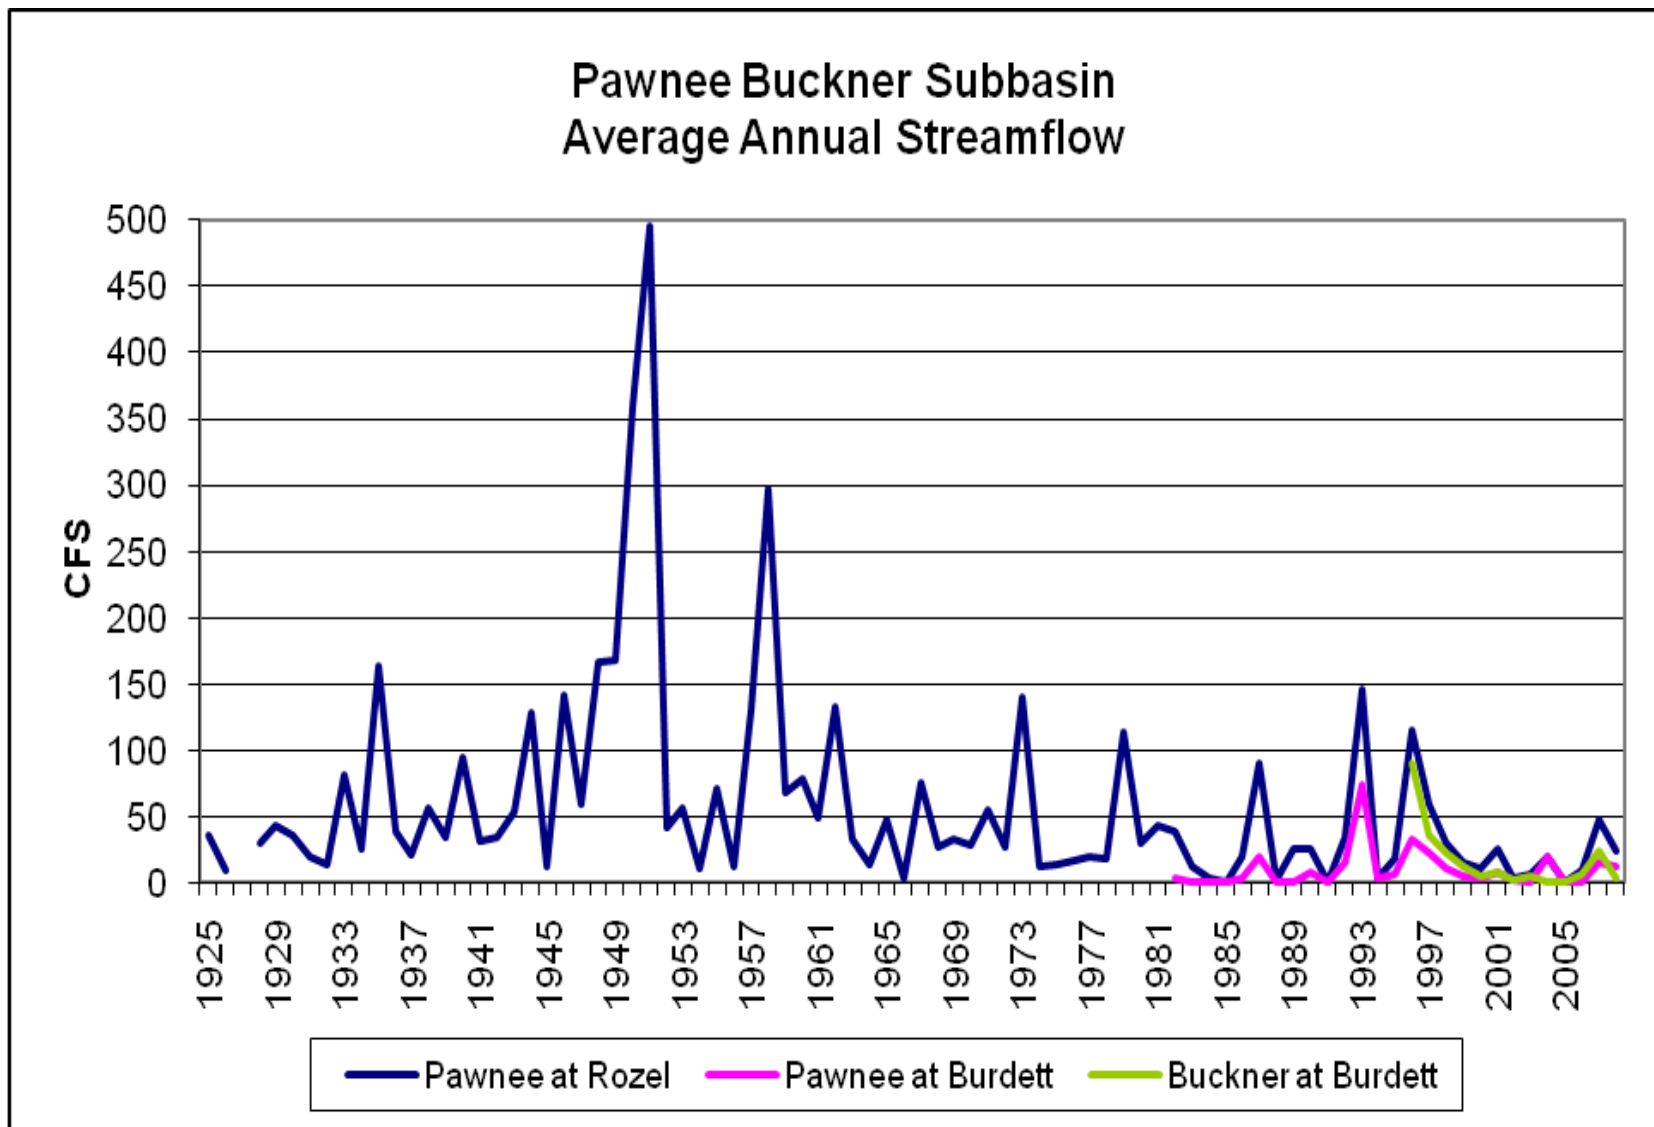


Figure 6: Average Annual Streamflow at USGS Gages 1925-2008

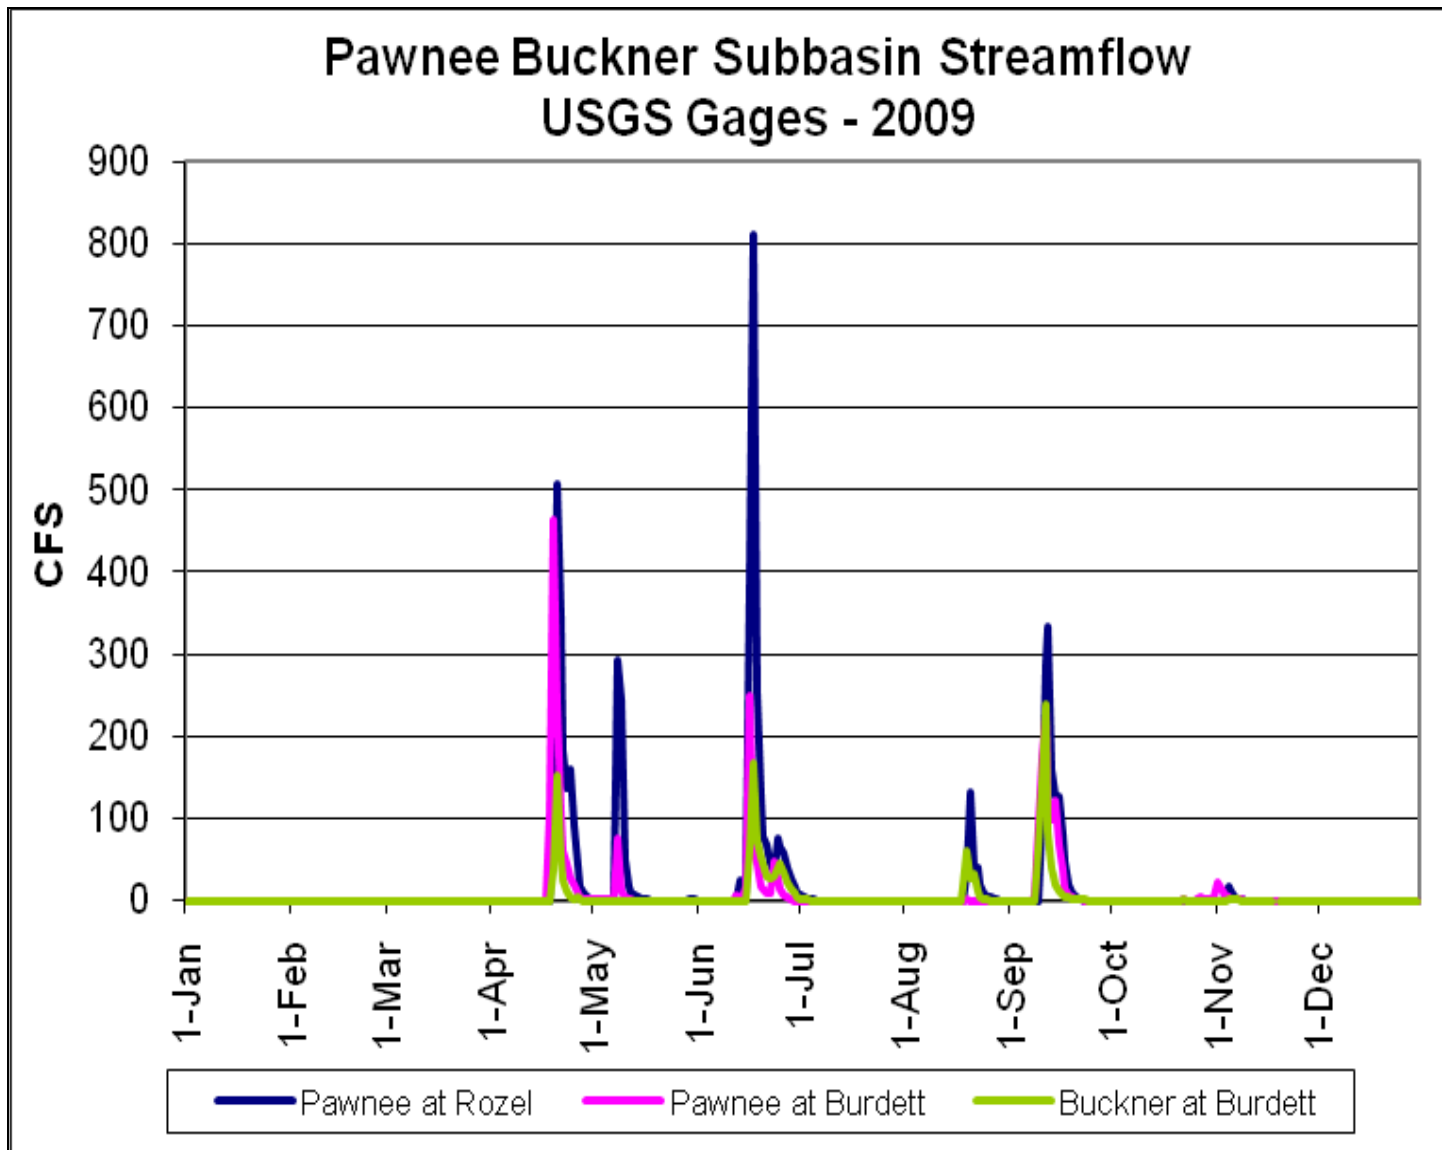


Figure 7: Daily Streamflow for 2009

IV. Groundwater

GMD #5 and KDA-DWR staff combine efforts to measure 75 wells in the Pawnee-Buckner subbasin (Figure 8). KDA-DWR collects additional water level measurements tri-annually in the winter, spring and fall. GMD 5 measures five wells on a quarterly basis and 21 wells in January within their district in Pawnee County.

Only winter measurements, taken in December, January or February, were used for the monitoring well water level charts, since those measurements are considered to be the least influenced by groundwater pumping. Figure 9 to Figure 20 chart groundwater levels in all the monitoring wells and the five-year rolling averages.

Legal descriptions of the well locations are available in the appendix. The following graphs chart water levels in each hydrologic subunit area. The y-axis is the depth below land surface (DBLS) in feet.

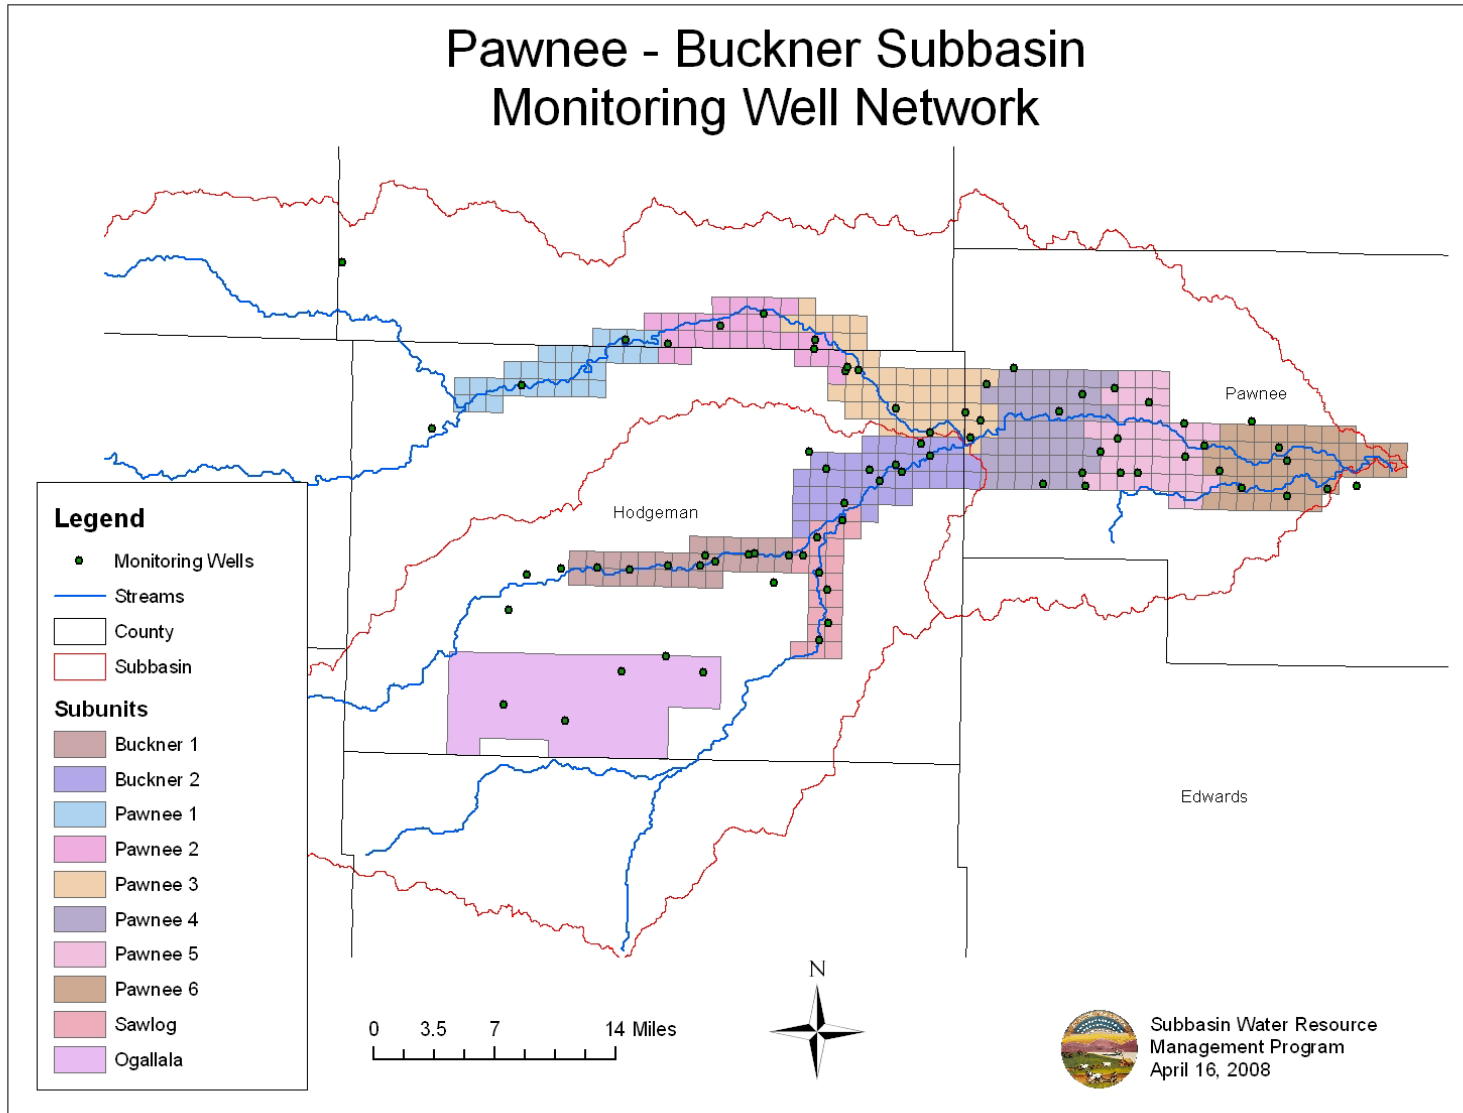


Figure 8: DWR Monitoring Wells

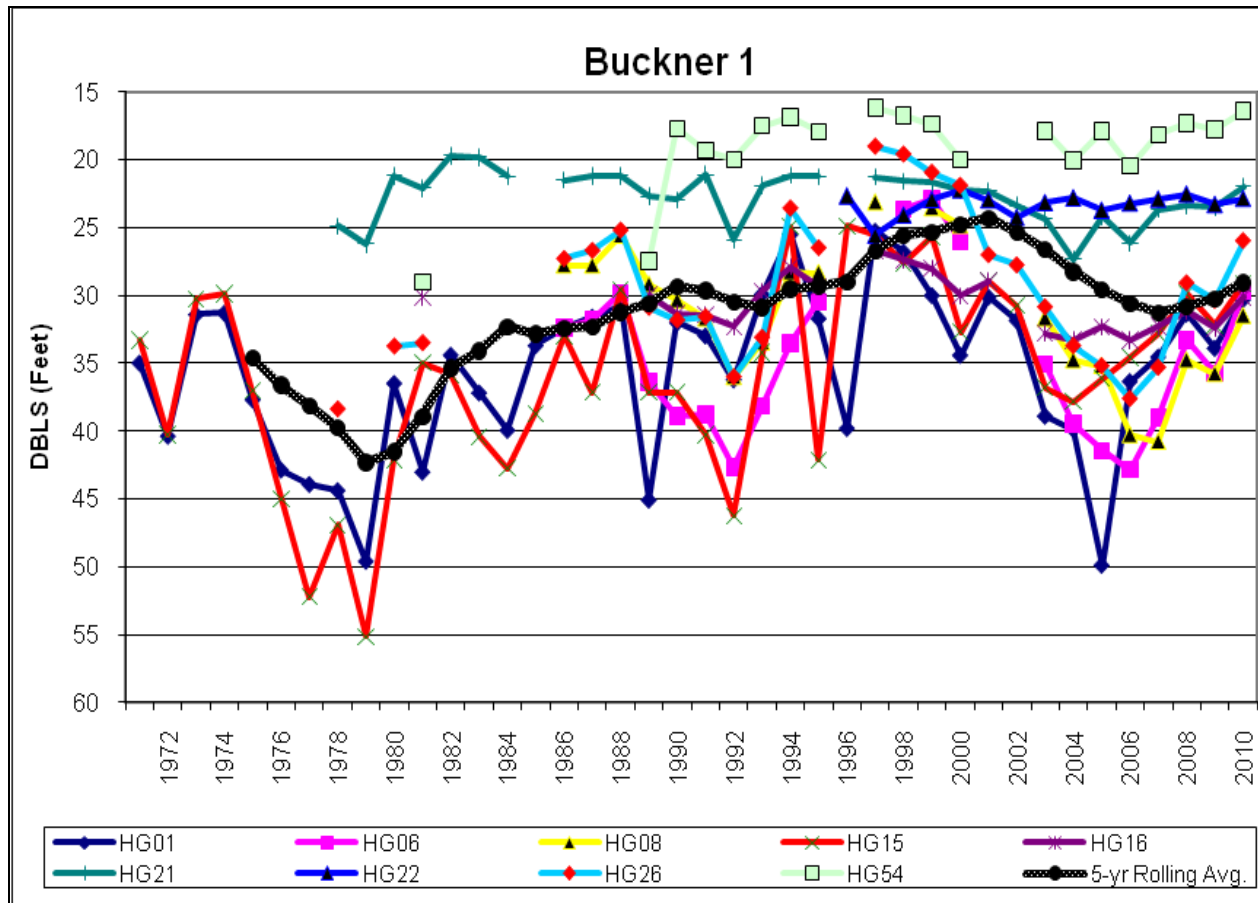


Figure 9: Monitoring well levels in Buckner 1

Buckner 1 subunit has nine monitoring wells. Water levels in these wells have shown an overall net increase of 8.16 feet over the period of record. The increase in the five-year rolling average is likely a result of the addition of monitoring wells in the 1980s. Following the 1990s, the five-year rolling average declined until 2008 when it increased 0.45 feet and increased again in 2009 another 0.52 feet. It continued to increase 1.25 feet in 2010. Most of the water levels increased in 2007 and 2008, but declined in 2009. All water levels increased in 2010 (Figure 9).

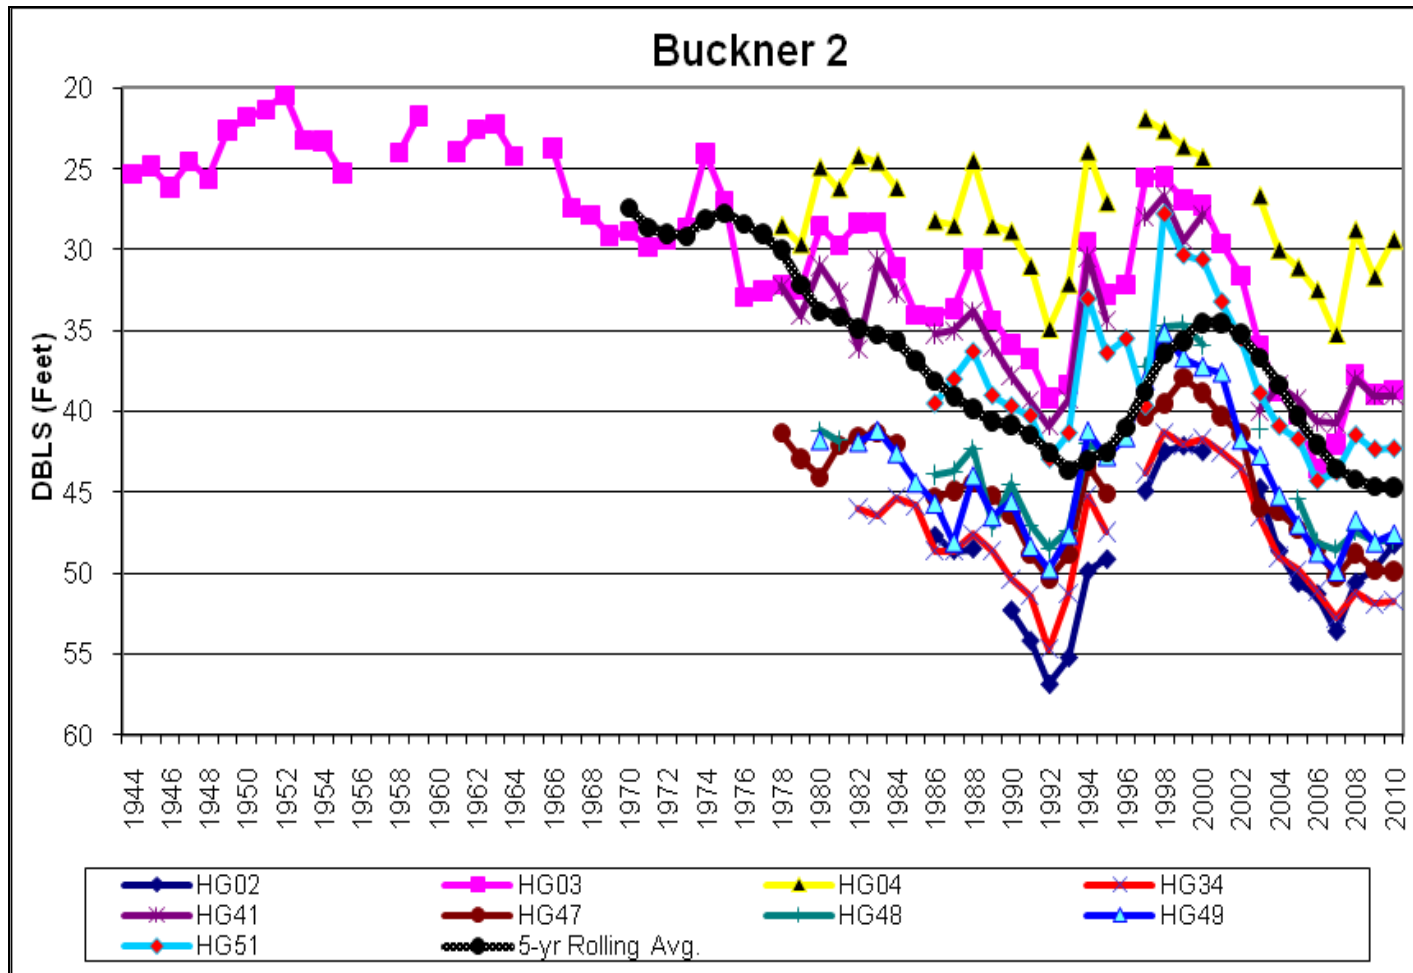


Figure 10: Monitoring well levels in Buckner 2

Buckner 2 subunit has nine monitoring wells. All the wells are in Hodgeman County. Unlike Buckner 1, the water levels show an overall downward trend. This subunit experienced a large rise in water levels during the late-1990s to early-2000s. Even though most of the wells saw an improvement in water levels for 2010, the five-year rolling average continued to decline slightly (0.05 feet) (Figure 10). HG03 has the longest record dating back to 1944 and has a net decline of 13.37 feet.

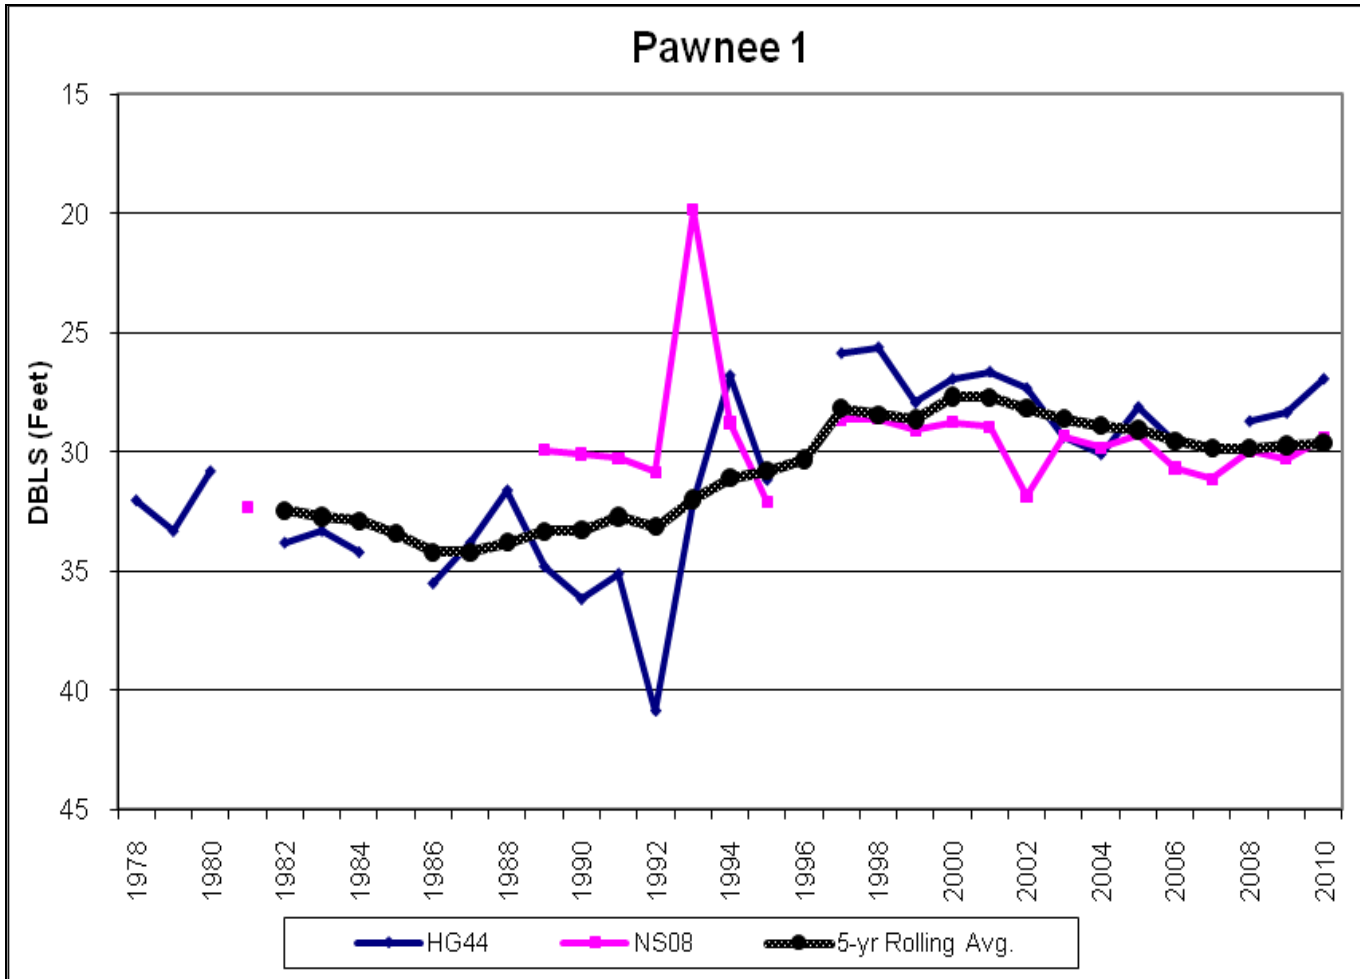


Figure 11: Monitoring well levels Pawnee 1

Pawnee 1 subunit is located furthest upstream along the Pawnee River and has two monitoring wells. The five-year rolling average is higher in 2010 than it was during the 1980s. In 2010, both HG44 and NS08 had increases in water levels; 1.42 feet and 0.86 feet respectively (Figure 11). Both wells have seen a net increase since their initial measurements (HG44, 5.1 feet and NS08, 2.88 feet).

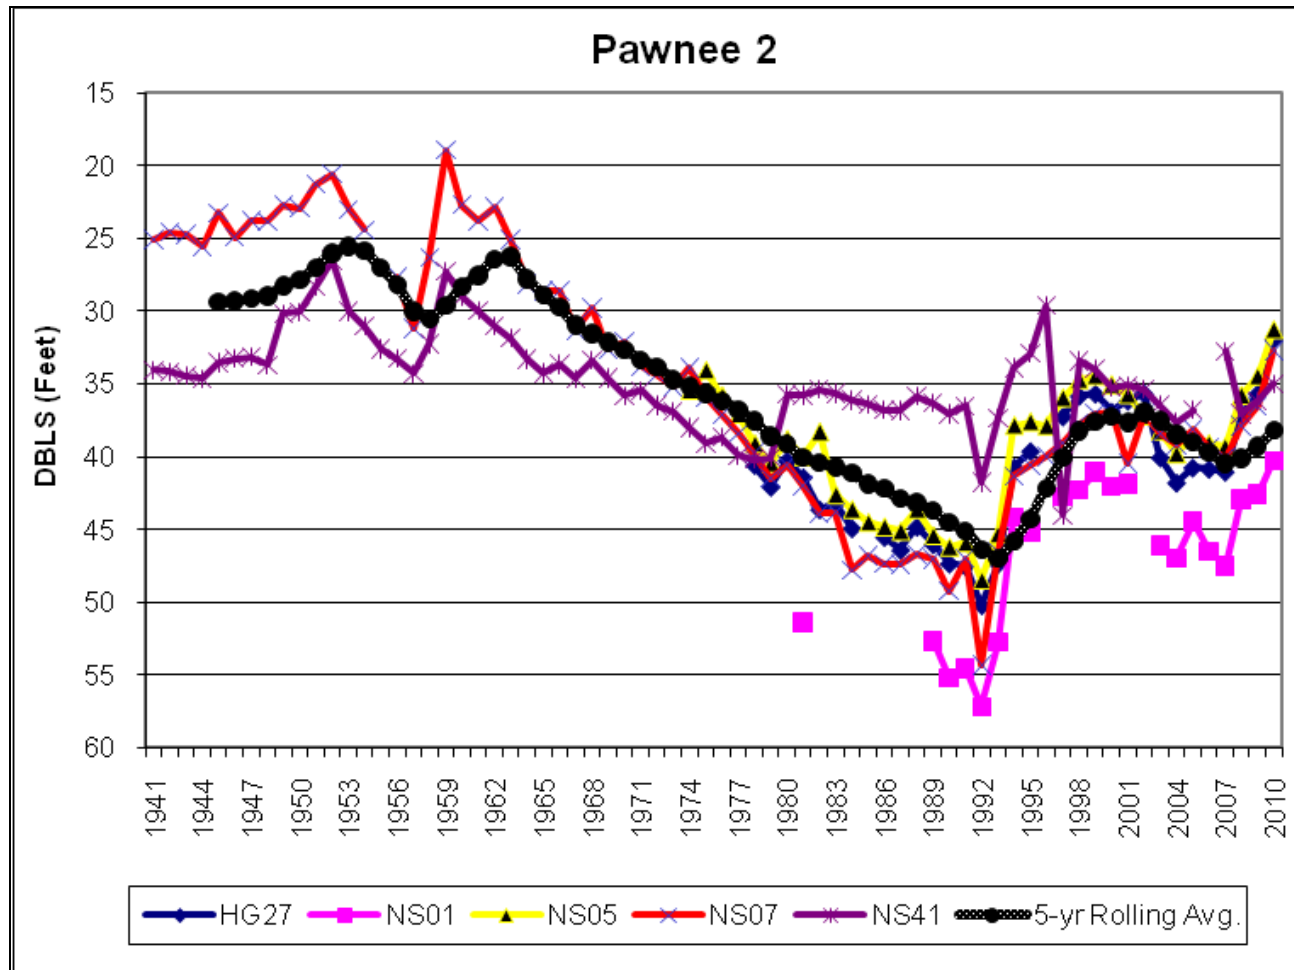


Figure 12: Monitoring well levels Pawnee 2

Pawnee 2 subunit has five monitoring wells. This subunit has an overall long-term declining trend. The five-year rolling average has exhibited a net decline of 8.82 feet since 1945 even with rises in water levels during the 1990s. Since measurements began in 1941, NS41 and NS 07 have seen a net decline in water levels of 0.94 feet and 9.41 feet respectively (Figure 12). All water levels in the subunit increased in 2010.

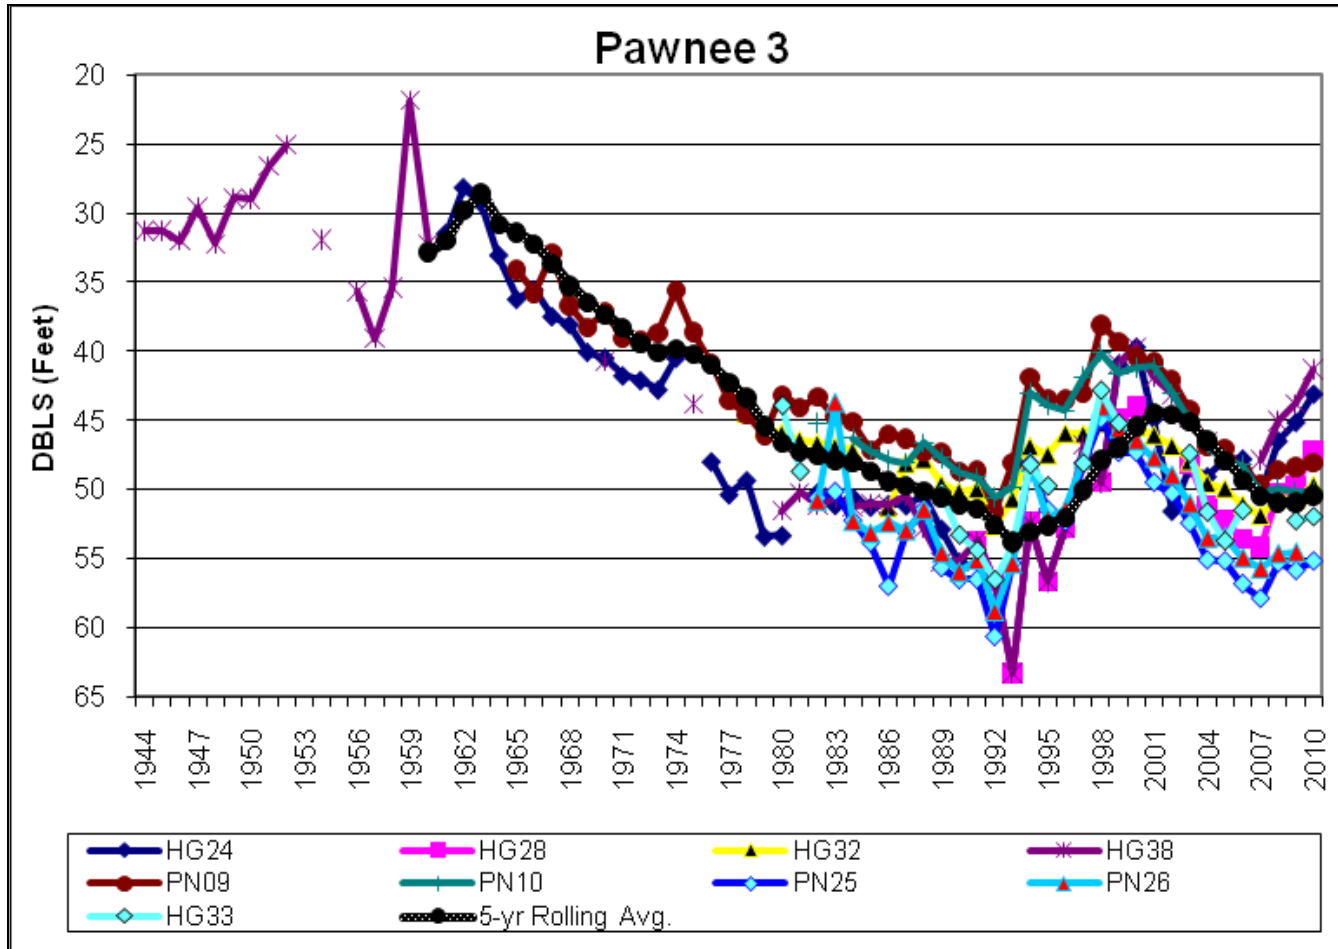


Figure 13: Monitoring well levels Pawnee 3

Pawnee 3 subunit has nine monitoring wells and similar to Pawnee 2 has seen declines. HG38 has the longest record spanning 1944 – 2010, and in that time, it has seen a net decline in water levels of 10.01 feet. The five-year rolling average has also declined a net 17.5 feet even with the rise in water levels during the 1990s. All the wells had an increase in water levels in 2010 except for PN10. It had a very slight decrease (Figure 13).

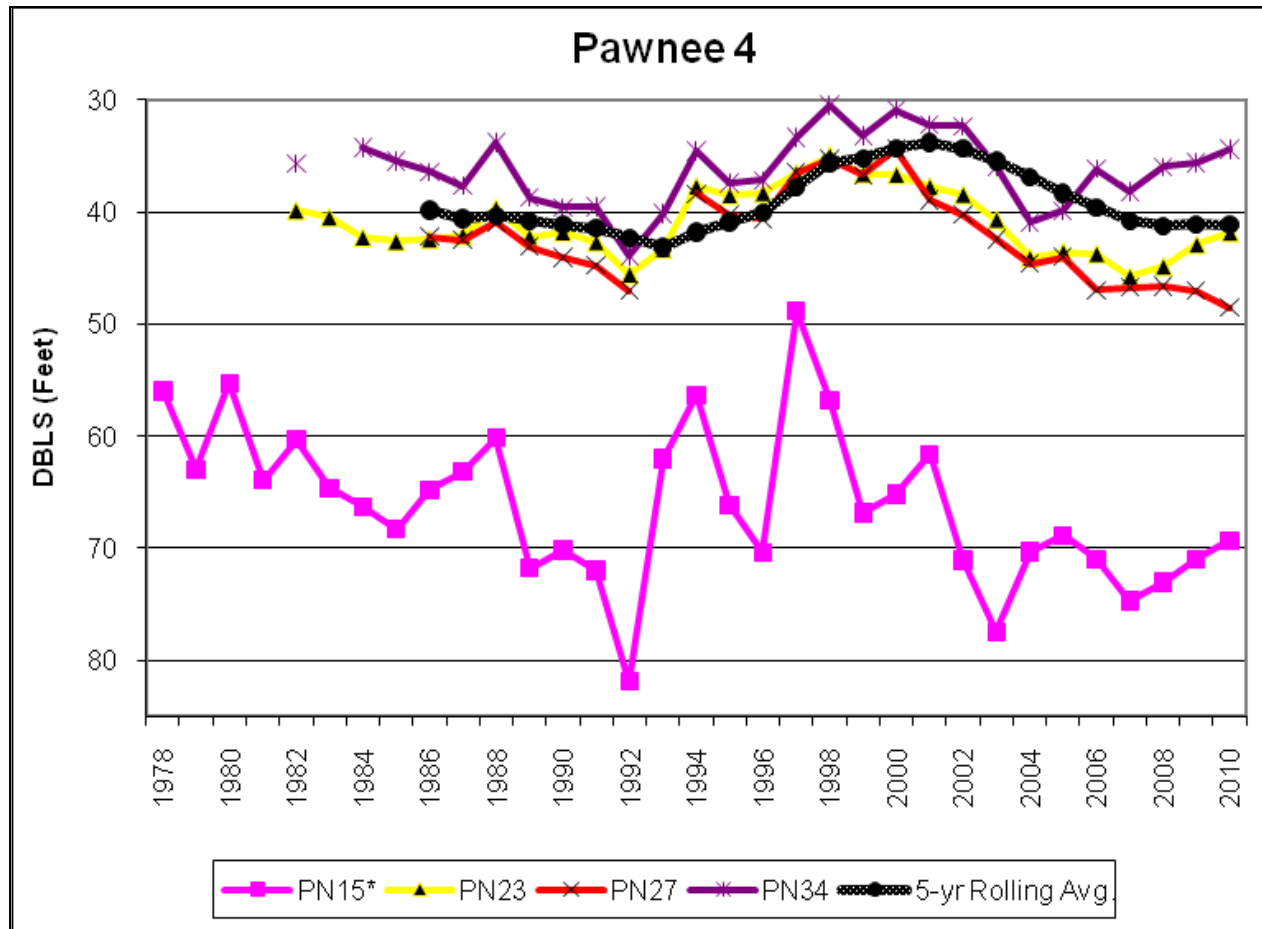


Figure 14: Monitoring well levels Pawnee 4

Pawnee 4 subunit has four monitoring wells and is located downstream of the confluence of Buckner Creek and Pawnee River. These monitoring wells show an overall decline in water levels but it is not at the magnitude of subunits Pawnee 2 and Pawnee 3. The five-year rolling average has declined 1.31 feet since 1982. Three of the four wells experienced a rise in water levels in 2010. PN15 is an unconfined Dakota well and is not included in the 5-year rolling average. It has a net water level decline of 13.33 feet since 1978 (Figure 14).

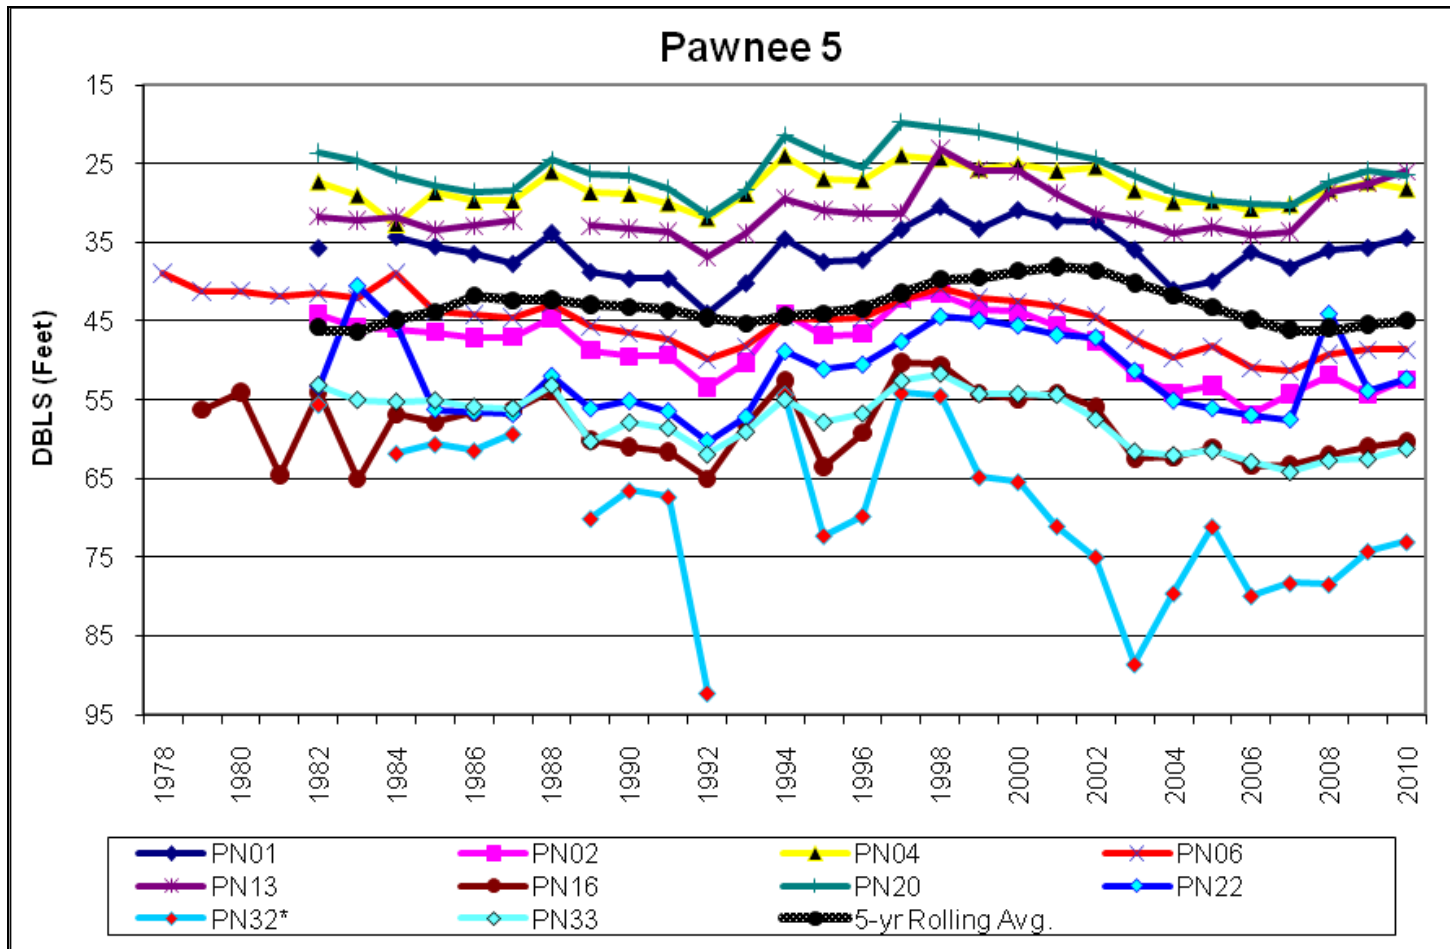


Figure 15: Monitoring well levels Pawnee 5

Pawnee 5 subunit has ten monitoring wells. Most of the wells have similar water level trends except for PN32 which is assumed to be drilled in both the alluvial and unconfined Dakota aquifer. The five-year rolling average remains relatively stable over time. Eight of the ten wells (except PN20 and PN04) saw a rise in water levels for 2010 (Figure 15). PN06 and PN16 have the longest record and have shown a net decline of 9.7 feet and 4.06 feet respectively.

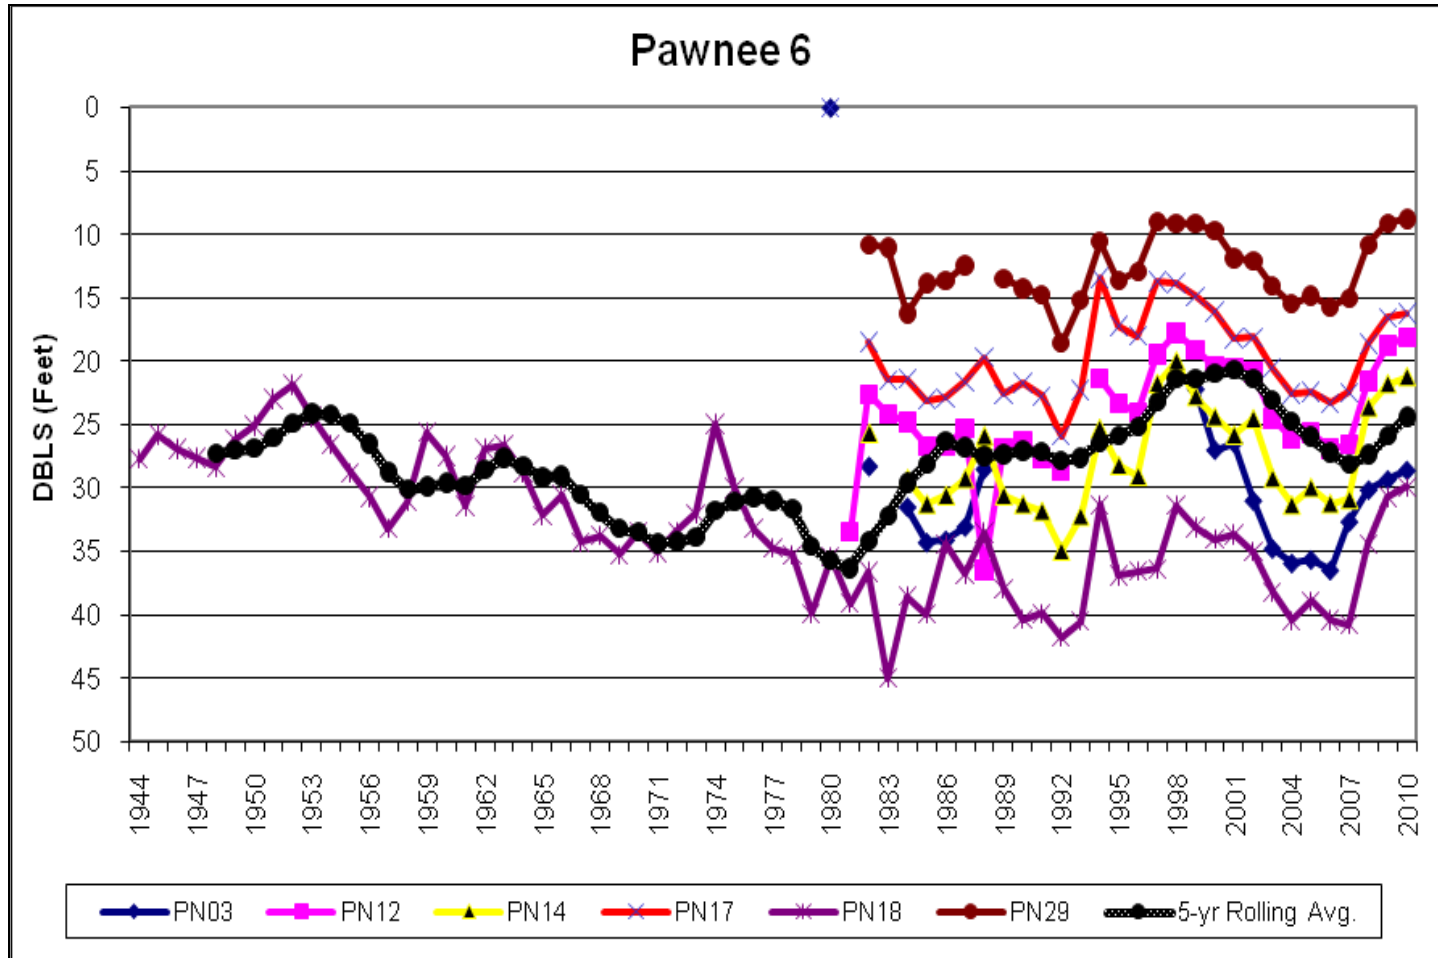


Figure 16: Monitoring well levels Pawnee 6

Pawnee 6 subunit has six monitoring wells. PN18 has a long record dating back to 1944 and has experienced a net water level decrease of 2.21 feet. The rise in the five-year rolling average in the early-1980s can likely be explained by the new wells added to the network. As in the other subunits, water levels declined after the 1990s but increased in 2008 (Figure 16). All the monitoring wells continued to increase in 2009 and 2010.

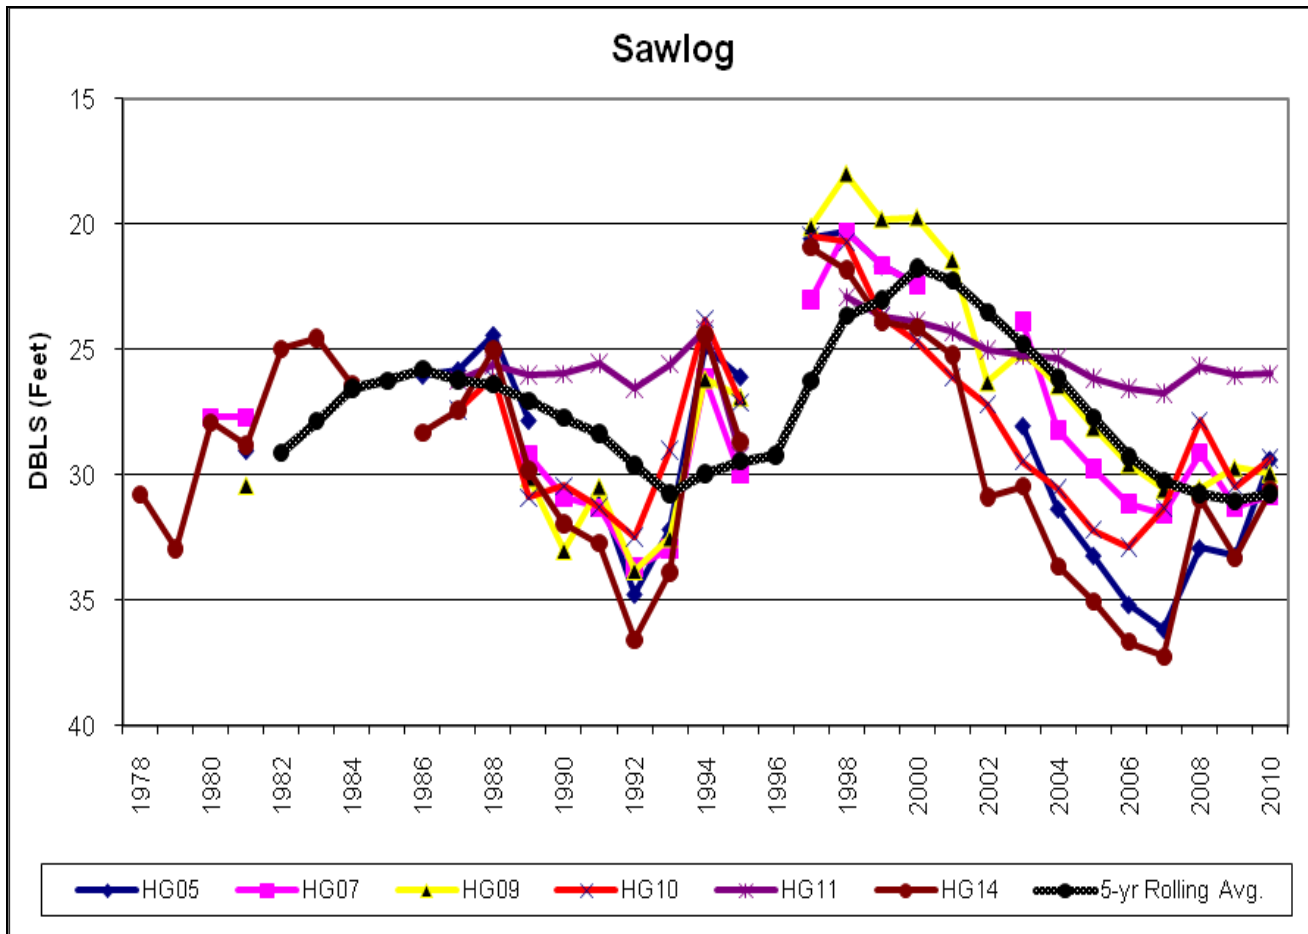


Figure 17: Monitoring well levels Sawlog

The Sawlog subunit enters Buckner Creek between Buckner 1 and Buckner 2 subunits. Sawlog has six monitoring wells. All six wells are missing records during the same years in the 1990s. This affects the five-year rolling average and individual trends. Water levels have been generally declining in the Sawlog until 2007 (Figure 17). Many of the 2008 water levels were near their initial measurement. In 2009, five of the wells had declining water levels (except for HG09). In 2010, five of the six monitoring wells had a rise in water levels. The five-year rolling average increased in 2010.

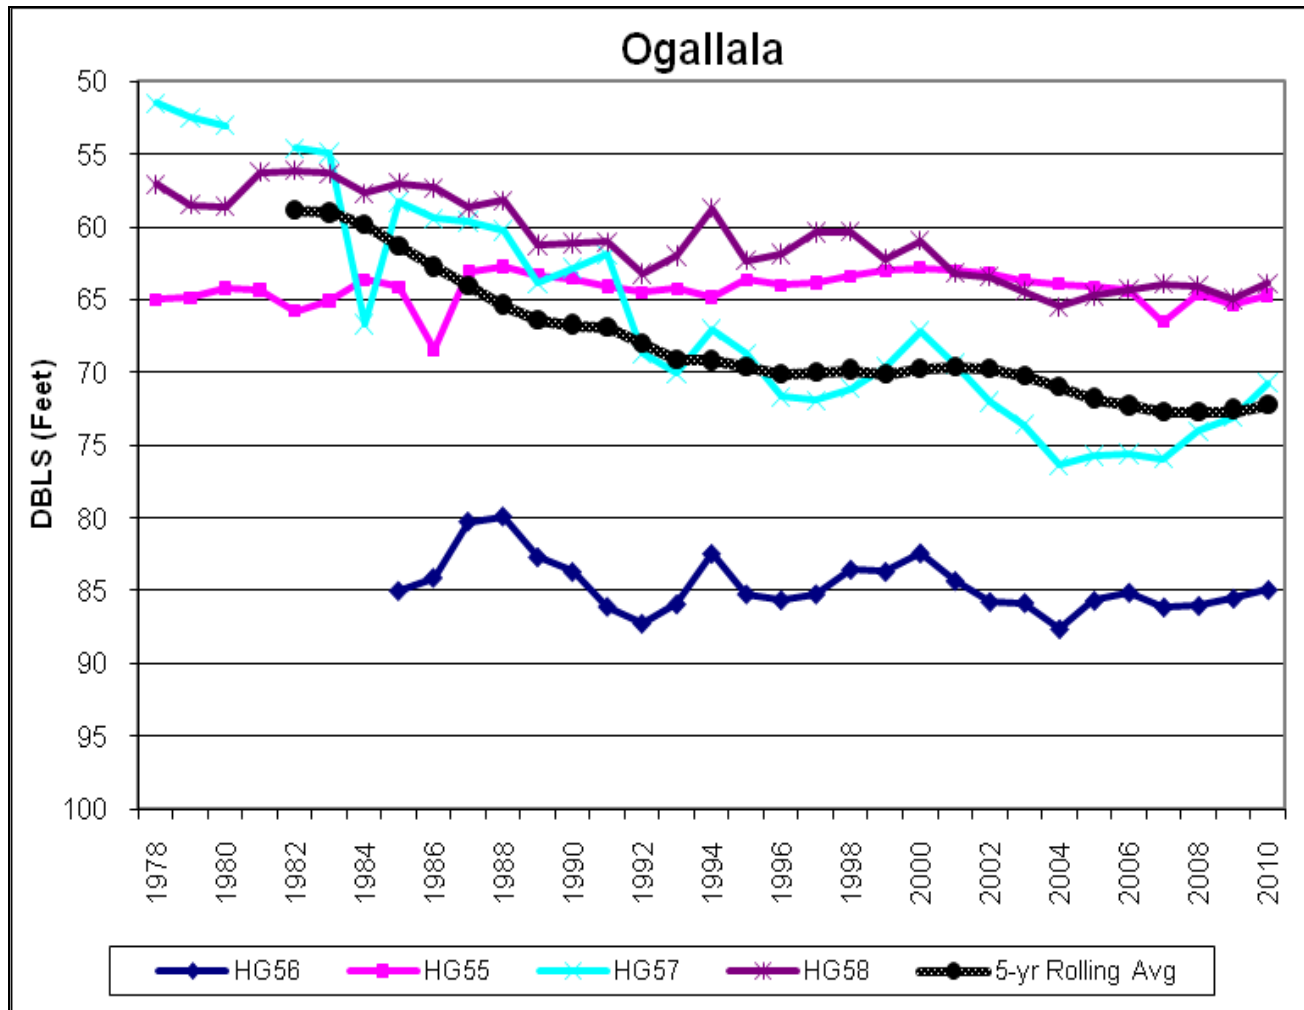


Figure 18: Monitoring well levels Ogallala

The Ogallala subunit is located in southern Hodgeman County. The subunit has four monitoring wells (Figure 18). HG57, HG58 and HG55 were first measured in 1978. While there is an overall decline in water levels, all four wells had an increase in water levels in 2010. The five-year rolling average had a net decline of 13.36 feet.

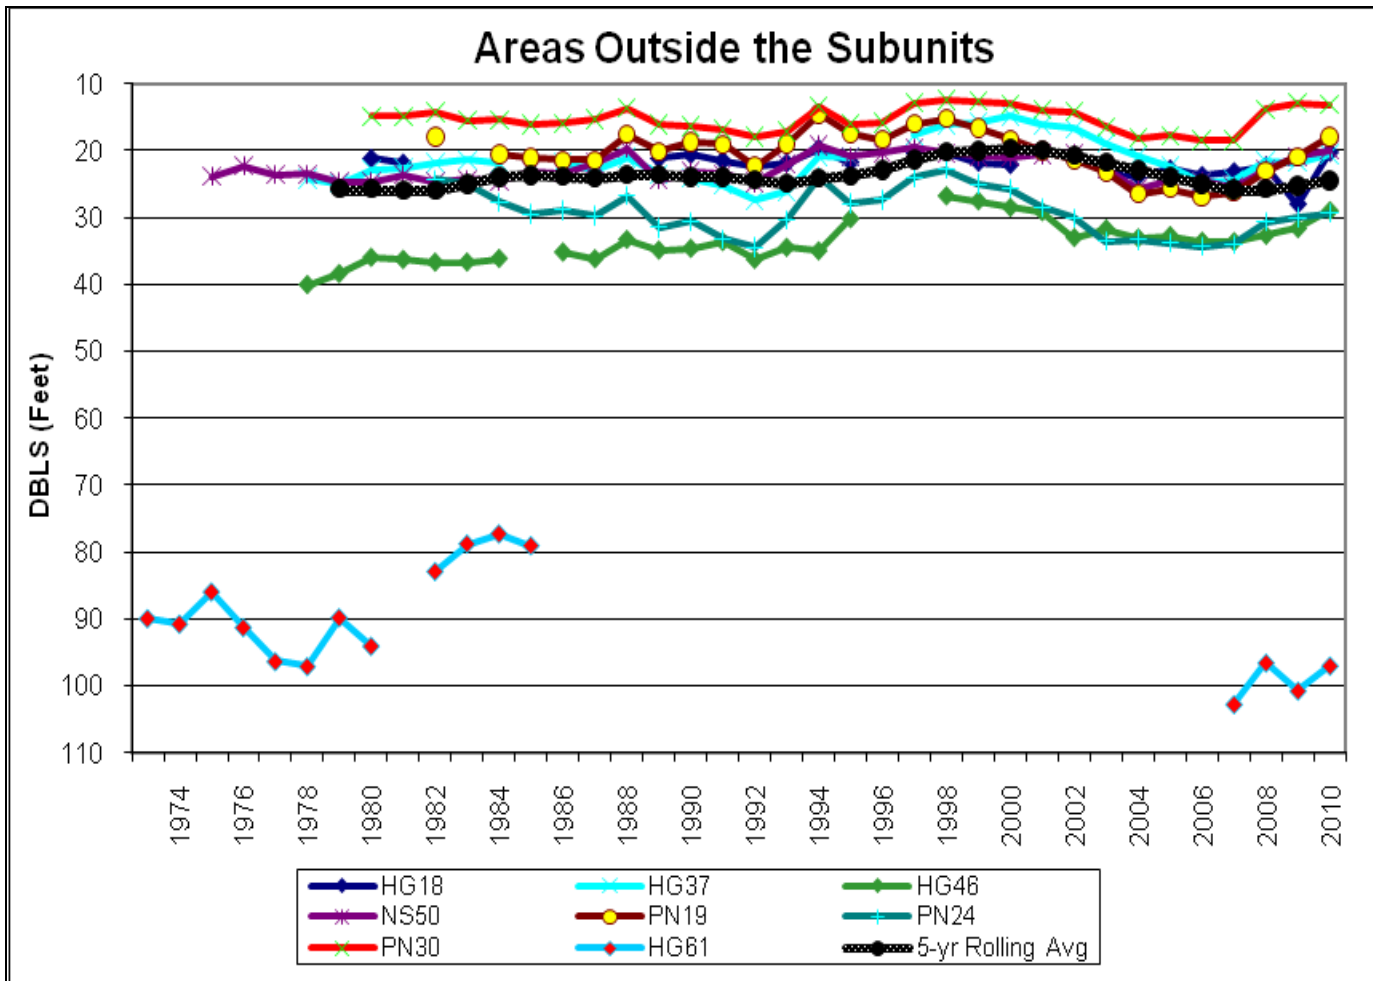


Figure 19: Monitoring well levels outside defined subunits.

Eight monitoring wells lie outside of the proposed subunits. HG61 dates back to 1973 but is missing years of data from 1985 to 2006. It has a net decline of 7.03 feet since 1973. The five-year rolling average increased in 2010 by 0.84 feet (Figure 19). Seven monitoring wells had a rise in water levels in 2010.

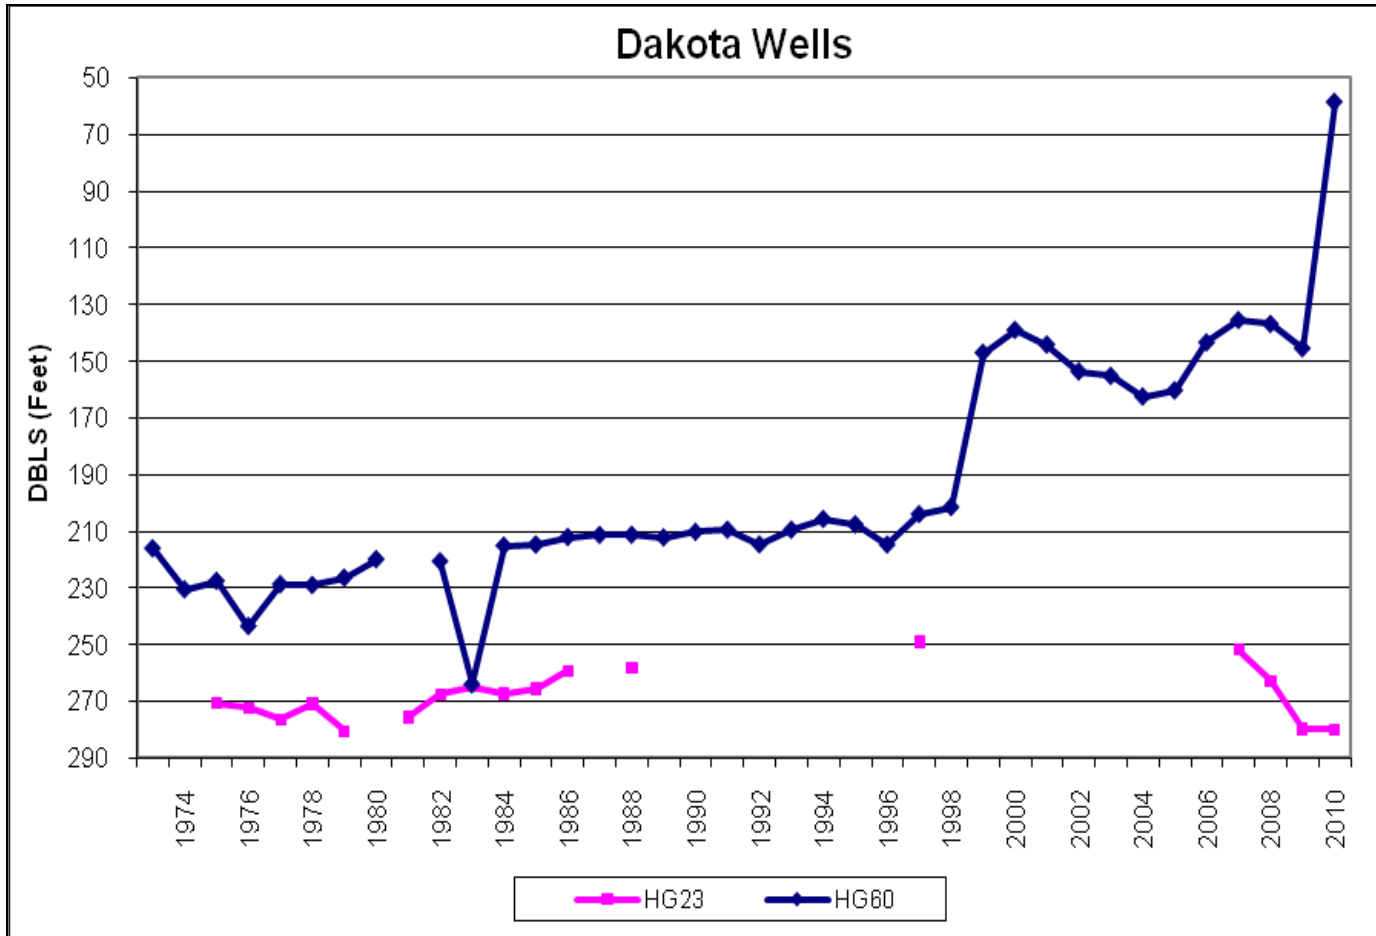


Figure 20: Monitoring well level outside defined subunits - Dakota Well

There are two wells drilled in the Dakota Aquifer. One is located outside of the proposed subunits (HG23) while the other is located within the proposed Ogallala subunit (HG60). Both wells have records dating back to the 1970s. HG23 declined nearly 20 feet in 2009 and HG60 also declined but has exhibited a net increase. In 2010, HG60 increased nearly 100 feet and HG23 leveled off (Figure 20).

V. Water Use

The Pawnee-Buckner subbasin has a total of 1,223 water rights with an authorized quantity of 249,331 acre-feet (AF). A significant percentage of the total authorized quantity (over 10 percent) is held by vested water rights (Table 1). The following map (Figure 21) has all the surface water and groundwater points of diversion. More than one point of diversion can be associated with one water right. Forty-nine surface water points of diversion are Pawnee Watershed dams.

Table 1: Water Rights in the Pawnee-Buckner Subbasin

Type	Source	Number of Rights	Authorized Quantity
Vested	Surface Water	27	5,218
Vested	Groundwater	126	20,990
Appropriated	Surface Water	33	7,674
Appropriated	Groundwater	1,037	215,450

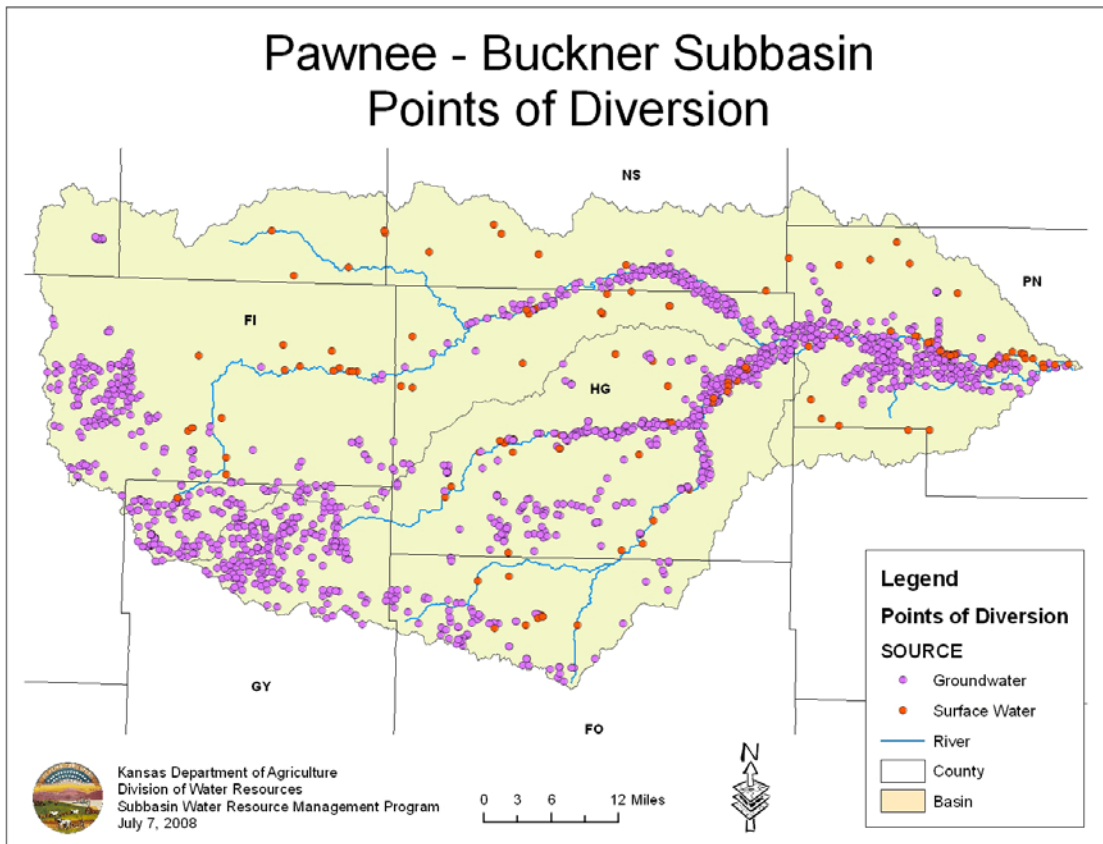


Figure 21: Pawnee-Buckner Subbasin Points of Diversion

The water use ranges from 56,820 acre-feet in 1993 to 134,971 acre-feet in 1991. The average water use over the twenty-one year span was 104,258 acre-feet. Water use in 2008 (the most recent year for which complete records are available) was 103,854 acre-feet. This is higher than in 2007, but still below the average for the subbasin (Figure 22). Note: Some water use data reported was based on unmetred sources (rate/hrs).

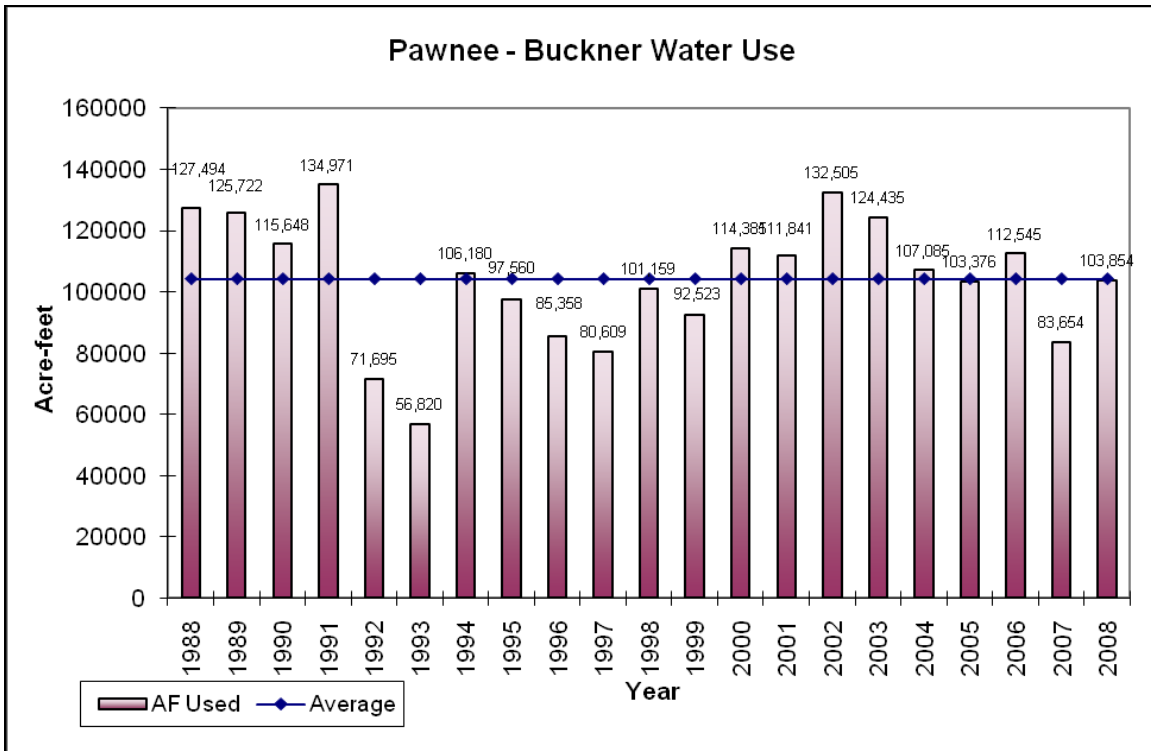


Figure 22: Ground and surface water use by year 1988-2008

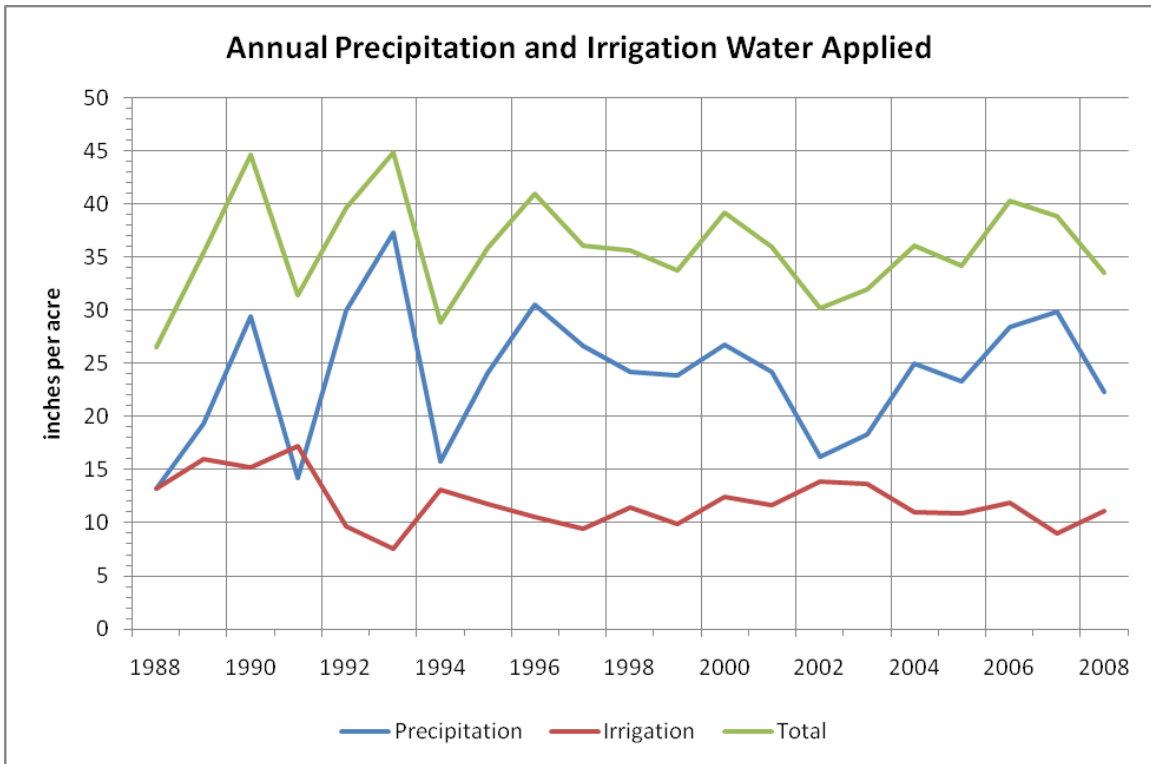


Figure 23: Annual Precipitation and Irrigation (inches per acre) 1988-2008

Figure 23 highlights the precipitation and irrigation for each year in the Pawnee-Buckner subbasin from 1988-2008. The green line is the total of precipitation and irrigation. Since precipitation declined in 2008, inches of irrigation water applied increased.

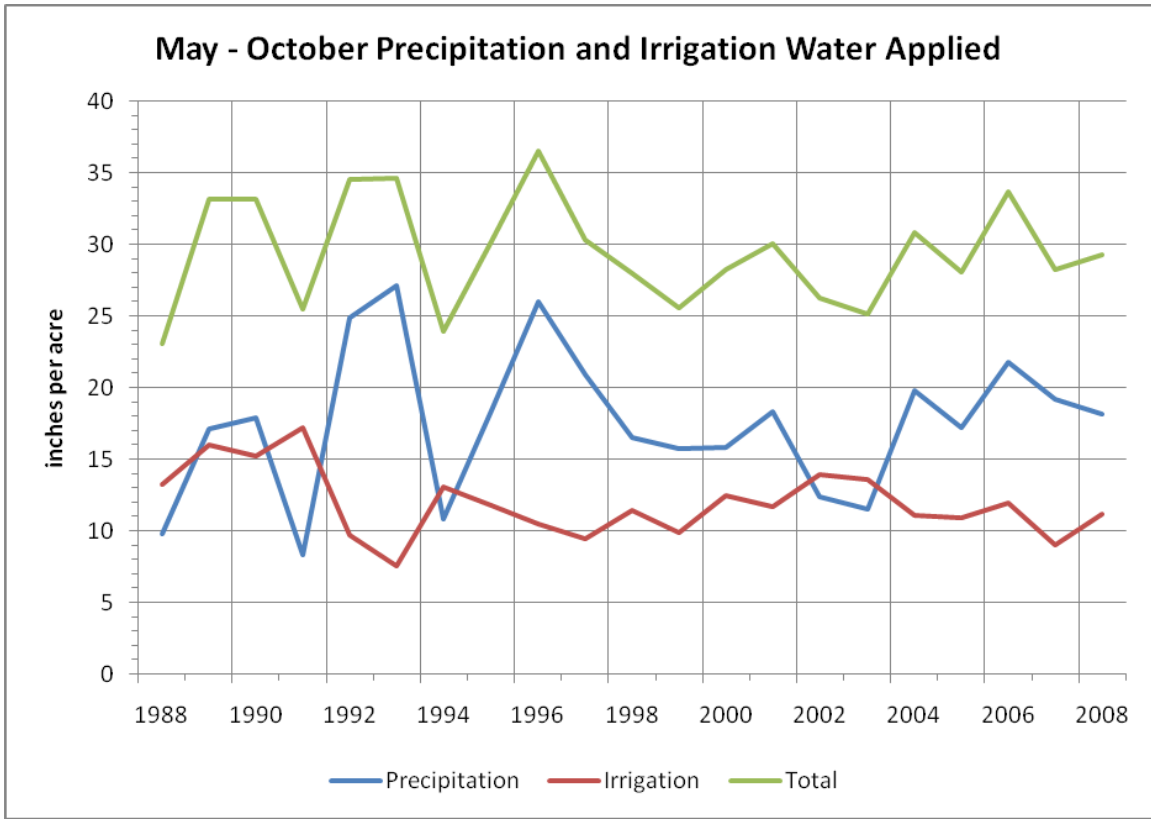


Figure 24: May-October Precipitation and Irrigation (inches per acre) 1988-2008

VI. Conclusions

Precipitation levels were above average for 2009. Most of the water levels continued to climb throughout the subbasin. Water use in 2008 was higher than in 2007 but still below the historical annual average. It is important to continue to increase our understanding of the impacts of pumping, how fast the system recovers after recharge events, and other characteristics of the hydrologic system in order to evaluate the long-term effects of water usage on this subbasin, protect property rights, and ensure the benefits of these water resources to future generations.

VII. Appendix

Wells are measured in coordination by KGS, KDA-DWR and GMD5.

Well ID	Location	Latitude	Longitude	HUC
HG01	23 23W 04 NENESE	38.085240	-99.844620	Buckner 1
HG02	22 22W 10 NENENW	38.160290	-99.716830	Buckner 2
HG03	22 22W 13 SWSWSW	38.131580	-99.696550	Buckner 2
HG04	22 22W 23 SESESE	38.117840	-99.698350	Buckner 2
HG05	22 22W 33 SESWSE	38.087430	-99.739790	Sawlog
HG06	22 23W 36 SESESW	38.087970	-99.791440	Buckner 1
HG07	23 22W 03 SESWSW	38.073110	-99.722350	Sawlog
HG08	23 22W 05 NENENW	38.087210	-99.754430	Buckner 1
HG09	23 22W 11 SWSWSW	38.058610	-99.713330	Sawlog
HG10	23 22W 23 SWSWSE	38.030260	-99.712130	Sawlog
HG11	23 22W 27 SESWSE	38.015700	-99.721310	Sawlog
HG13	23 23W03 NE01	38.080720	-99.833760	Buckner 1
HG14	22 22W 27 SESWSW	38.102470	-99.724530	Sawlog
HG15	23 23W 04 SESWNE	38.076920	-99.849150	Buckner 1
HG16	23 23W 06 SESENE	38.076310	-99.883610	Buckner 1
HG18	23 24W 07 NENWNW	38.072640	-99.997940	Outside
HG21	23 24W 11 NENWNW	38.072630	-99.924800	Buckner 1
HG22	23 24W 11 SENWNW	38.066500	-100.035300	Buckner 1
HG23	23 25W 22 SENWNW	38.036190	-100.053300	Outside
HG24	21 22W 12 NWSWNW	38.243630	-99.697670	Pawnee 3
HG26	23 23W 01 NWNENE	38.086710	-99.797910	Buckner 1
HG27	21 22W 03 NWNWNE	38.261610	-99.731320	Pawnee 2
HG28	21 22W 12 NENESW	38.244750	-99.683180	Pawnee 3
HG32	21 21W 21 NWSWSW	38.212730	-99.642990	Pawnee 3
HG33	21 21W 26 SWSWNW	38.192950	-99.606210	Pawnee 3
HG34	21 21W 34 NESWSW	38.182990	-99.615340	Buckner 2
HG37	22 22W 04 NENENE	38.174590	-99.735120	Outside
HG38	21 22W 12 NWNWNE	38.246970	-99.695260	Pawnee 3
HG41	22 21W 06 SESWSW	38.160430	-99.670300	Buckner 2
HG44	21 25W 14 NWSWNW	38.226770	-100.044300	Pawnee 1
HG46	21 26W 35 NENESW	38.188270	-100.139700	Outside
HG47	22 21W 02 NWNWSW	38.172880	-99.605980	Buckner 2
HG48	22 21W 09 NWNENE	38.159330	-99.635150	Buckner 2
HG49	22 21W 04 NWSWNW	38.164970	-99.642570	Buckner 2
HG51	22 21W 08 SWNWNE	38.151250	-99.659190	Buckner 2
HG54	23 24W 04 SESWSE	38.074040	-99.959850	Buckner 1
HG55	24 24W 20 SWSWSW	37.943420	-99.990880	Ogallala
HG56	24 25W 22 NWNENW	37.956680	-100.057400	Ogallala
HG57	24 24W 02 SWSWSW	37.986180	-99.931430	Ogallala
HG58	24 23W 03 SWSWSW	37.986650	-99.844250	Ogallala
HG60	24 23W 06 NENENW	38.000170	-99.884420	Ogallala
HG61	23 22W 07 SENENE	38.063980	-99.770800	Outside
NS01	20 23W 26 SENWSW	38.280540	-99.832180	Pawnee 2
NS05	20 22W 35 NWSWSW	38.269780	-99.730950	Pawnee 2
NS07	20 22W 20 SWSWSW	38.291080	-99.786710	Pawnee 2

NS08	20 24W 36 SWNWNW	38.266680	-99.933740	Pawnee 1
NS41	20 23W 32 SWSENE	38.263830	-99.888050	Pawnee 2
NS50	20 26W 07 NWSESW	38.328020	-100.239400	Outside
PN01	22 18W 05 NWNWNW	38.174830	-99.332140	Pawnee 5
PN02	21 19W 33 SWNWSW	38.178620	-99.423380	Pawnee 5
PN03	21 18W 33 NWSWNW	38.184360	-99.312140	Pawnee 6
PN04	21 19W 14 SESESE	38.220550	-99.371660	Pawnee 5
PN06	21 19W 27 SWSWSW	38.190190	-99.404980	Pawnee 5
PN09	21 20W 29 NWNWNW	38.203890	-99.551760	Pawnee 3
PN10	21 20W 31 NENENW	38.189230	-99.562170	Pawnee 3
PN12	22 17W 05 NWNWSW	38.172490	-99.222800	Pawnee 6
PN13	22 19W 03 SWSWNW	38.163560	-99.295720	Pawnee 5
PN14	22 18W 11 SWSENE	38.148880	-99.270910	Pawnee 6
PN15	22 19W 07 NENENE	38.160650	-99.442040	Pawnee 4
PN16	22 19W 10 NWNWNE	38.160850	-99.401560	Pawnee 5
PN17	21 17W 31 NWSENE	38.183720	-99.232370	Pawnee 6
PN18	22 17W 18 NENESE	38.143200	-99.223180	Pawnee 6
PN19	21 18W 23 SESENE	38.206070	-99.261460	Outside
PN20	21 18W 30 NENENE	38.203300	-99.333800	Pawnee 5
PN22	21 19W 16 NENENW	38.232520	-99.409210	Pawnee 5
PN23	21 19W 18 NESESE	38.227050	-99.443650	Pawnee 4
PN24	21 20W 04 SESESE	38.248490	-99.516680	Outside
PN25	21 20W 08 SWSESW	38.234010	-99.546410	Pawnee 3
PN26	21 20W 19 SWNWNW	38.210470	-99.568660	Pawnee 3
PN27	21 20W 24 NESWSW	38.212480	-99.468450	Pawnee 4
PN29	22 17W 10 SW	38.148990	-99.179400	Pawnee 6
PN30	22 17W 12 SWNWNW	38.151680	-99.148770	Outside
PN32	22 19W 08 SW	38.149130	-99.438850	Pawnee 5
PN33	22 19W 11 NWNWNW	38.160780	-99.383300	Pawnee 5
PN34	22 20W 11 SENWSE	38.150650	-99.483990	Pawnee 4